



Figure similar

SIRIUS soft starter 200-480 V 143 A, 110-250 V AC Screw terminals  
Analog output

**product brand name**

**product category**

**product designation**

**product type designation**

**manufacturer's article number**

- of standard HMI module usable
- of high feature HMI module usable
- of communication module PROFINET standard usable
- of communication module PROFIBUS usable
- of communication module Modbus TCP usable
- of communication module Modbus RTU usable
- of communication module Ethernet/IP
- of circuit breaker usable at 400 V
- of circuit breaker usable at 500 V
- of the gG fuse usable up to 690 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V
- of line contactor usable up to 480 V
- of line contactor usable up to 690 V

SIRIUS

Hybrid switching devices

Soft starter

3RW50

[3RW5980-OHS01](#)

[3RW5980-OHF00](#)

[3RW5980-OCS00](#)

[3RW5980-0CP00](#)

[3RW5980-0CT00](#)

[3RW5980-0CR00](#)

[3RW5980-0CE00](#)

[3VA2220-7MN32-0AA0](#); Type of assignment 1, Iq = 20 kA

[3VA2220-7MN32-0AA0](#); Type of assignment 1, Iq = 20 kA

[3NA3244-6](#); Type of coordination 1, Iq = 65 kA

[3NE1 227-0](#); Type of coordination 2, Iq = 65 kA

[3NE3 334 -0B](#); Type of coordination 2, Iq = 65 kA

[3RT1055](#)

[3RT1055](#)

**General technical data**

**starting voltage [%]**

30 ... 100 %

**stopping voltage [%]**

50 %; non-adjustable

**start-up ramp time of soft starter**

0 ... 20 s

**ramp-down time of soft starter**

0 ... 20 s

**current limiting value [%] adjustable**

130 ... 700 %

**certificate of suitability**

- CE marking Yes
- UL approval Yes
- CSA approval Yes

**product component**

- HMI-High Feature No
- is supported HMI-Standard Yes
- is supported HMI-High Feature Yes

**product feature integrated bypass contact system**

Yes

**number of controlled phases**

2

**trip class**

CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2

**buffering time in the event of power failure**

- for main current circuit 100 ms

<ul style="list-style-type: none"> <li>• for control circuit</li> </ul>	100 ms
<b>insulation voltage rated value</b>	600 V
<b>degree of pollution</b>	3, acc. to IEC 60947-4-2
<b>impulse voltage rated value</b>	6 kV
<b>blocking voltage of the thyristor maximum</b>	1 400 V
<b>service factor</b>	1
<b>surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for safe isolation</b>	600 V
<ul style="list-style-type: none"> <li>• between main and auxiliary circuit</li> </ul>	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
<b>shock resistance</b>	15 mm to 6 Hz; 2g to 500 Hz
<b>vibration resistance</b>	AC-53a
utilization category according to IEC 60947-4-2	Q
<b>reference code according to IEC 81346-2</b>	09/23/2019
<b>Substance Prohibitance (Date)</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>• ramp-up (soft starting)</li> <li>• ramp-down (soft stop)</li> <li>• Soft Torque</li> <li>• adjustable current limitation</li> <li>• pump ramp down</li> <li>• intrinsic device protection</li> <li>• motor overload protection</li> <li>• evaluation of thermistor motor protection</li> <li>• auto-RESET</li> <li>• manual RESET</li> <li>• remote reset</li> <li>• communication function</li> <li>• operating measured value display</li> <li>• error logbook</li> <li>• via software parameterizable</li> <li>• via software configurable</li> <li>• <b>PROFenergy</b></li> </ul>	<ul style="list-style-type: none"> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes; Electronic motor overload protection</li> <li>No</li> <li>Yes</li> <li>Yes</li> <li>Yes; By turning off the control supply voltage</li> <li>Yes</li> <li>Yes; Only in conjunction with special accessories</li> <li>Yes; Only in conjunction with special accessories</li> <li>No</li> <li>Yes</li> <li>Yes; in connection with the PROFINET Standard communication module</li> <li>Yes</li> <li>No</li> <li>Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI)</li> </ul>
<ul style="list-style-type: none"> <li>• voltage ramp</li> <li>• torque control</li> <li>• analog output</li> </ul>	

## Power Electronics

<b>operational current</b>	
<ul style="list-style-type: none"> <li>• at 40 °C rated value</li> <li>• at 50 °C rated value</li> <li>• at 60 °C rated value</li> </ul>	<ul style="list-style-type: none"> <li>143 A</li> <li>128 A</li> <li>118 A</li> </ul>
<b>operating voltage</b>	
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	200 ... 480 V
<b>relative negative tolerance of the operating voltage</b>	-15 %
<b>relative positive tolerance of the operating voltage</b>	10 %
<b>operating power for 3-phase motors</b>	
<ul style="list-style-type: none"> <li>• at 230 V at 40 °C rated value</li> <li>• at 400 V at 40 °C rated value</li> </ul>	<ul style="list-style-type: none"> <li>37 kW</li> <li>75 kW</li> </ul>
<b>Operating frequency 1 rated value</b>	50 Hz
<b>Operating frequency 2 rated value</b>	60 Hz
<b>relative negative tolerance of the operating frequency</b>	-10 %
<b>relative positive tolerance of the operating frequency</b>	10 %
<b>adjustable motor current</b>	
<ul style="list-style-type: none"> <li>• at rotary coding switch on switch position 1</li> <li>• at rotary coding switch on switch position 2</li> <li>• at rotary coding switch on switch position 3</li> <li>• at rotary coding switch on switch position 4</li> <li>• at rotary coding switch on switch position 5</li> <li>• at rotary coding switch on switch position 6</li> <li>• at rotary coding switch on switch position 7</li> <li>• at rotary coding switch on switch position 8</li> <li>• at rotary coding switch on switch position 9</li> <li>• at rotary coding switch on switch position 10</li> </ul>	<ul style="list-style-type: none"> <li>68 A</li> <li>73 A</li> <li>78 A</li> <li>83 A</li> <li>88 A</li> <li>93 A</li> <li>98 A</li> <li>103 A</li> <li>108 A</li> <li>113 A</li> </ul>

<ul style="list-style-type: none"> <li>• at rotary coding switch on switch position 11</li> <li>• at rotary coding switch on switch position 12</li> <li>• at rotary coding switch on switch position 13</li> <li>• at rotary coding switch on switch position 14</li> <li>• at rotary coding switch on switch position 15</li> <li>• at rotary coding switch on switch position 16</li> <li>• minimum</li> </ul>	118 A
<b>minimum load [%]</b>	123 A
<b>power loss [W] for rated value of the current at AC</b>	128 A
<ul style="list-style-type: none"> <li>• at 40 °C after startup</li> <li>• at 50 °C after startup</li> <li>• at 60 °C after startup</li> </ul>	133 A
<b>power loss [W] at AC at current limitation 350 %</b>	138 A
<ul style="list-style-type: none"> <li>• at 40 °C during startup</li> <li>• at 50 °C during startup</li> <li>• at 60 °C during startup</li> </ul>	143 A
<b>type of the motor protection</b>	68 A
	15 %; Relative to smallest settable le
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC
<b>control supply voltage at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>	23 W
<b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>	19 W
<b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>	16 W
<b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>	1 336 W
<b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>	1 134 W
<b>control supply voltage frequency</b>	1 007 W
<b>relative negative tolerance of the control supply voltage frequency</b>	Electronic, tripping in the event of thermal overload of the motor
<b>relative positive tolerance of the control supply voltage frequency</b>	
<b>control supply current in standby mode rated value</b>	
<b>holding current in bypass operation rated value</b>	
<b>inrush current by closing the bypass contacts maximum</b>	
inrush current peak at application of control supply voltage maximum	
duration of inrush current peak at application of control supply voltage	
<b>design of the overvoltage protection</b>	
<b>design of short-circuit protection for control circuit</b>	
<b>Inputs/ Outputs</b>	
<b>number of digital inputs</b>	1
<b>number of digital outputs</b>	3
<ul style="list-style-type: none"> <li>• not parameterizable</li> </ul>	2
<b>digital output version</b>	2 normally-open contacts (NO) / 1 changeover contact (CO)
<b>number of analog outputs</b>	1
<b>switching capacity current of the relay outputs</b>	
<ul style="list-style-type: none"> <li>• at AC-15 at 250 V rated value</li> <li>• at DC-13 at 24 V rated value</li> </ul>	3 A
	1 A
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
<b>fastening method</b>	screw fixing
<b>height</b>	198 mm
<b>width</b>	120 mm
<b>depth</b>	249 mm
required spacing with side-by-side mounting	
<ul style="list-style-type: none"> <li>• forwards</li> </ul>	10 mm

- backwards
- upwards
- downwards
- at the side

0 mm  
100 mm  
75 mm  
5 mm  
3.2 kg

**weight without packaging**

**Connections/ Terminals**

**type of electrical connection**

- for main current circuit
- for control circuit

busbar connection  
screw-type terminals  
25 mm

**width of connection bar maximum**

**type of connectable conductor cross-sections**

- for main contacts for box terminal using the front clamping point solid
- for main contacts for box terminal using the front clamping point finely stranded with core end processing
- for main contacts for box terminal using the front clamping point finely stranded without core end processing
- for main contacts for box terminal using the front clamping point stranded
- for main contacts for box terminal using the back clamping point solid
- at AWG cables for main contacts for box terminal using the back clamping point
- for main contacts for box terminal using both clamping points solid
- for main contacts for box terminal using both clamping points finely stranded with core end processing
- for main contacts for box terminal using both clamping points finely stranded without core end processing
- for main contacts for box terminal using both clamping points stranded
- for main contacts for box terminal using the back clamping point finely stranded with core end processing
- for main contacts for box terminal using the back clamping point finely stranded without core end processing
- for main contacts for box terminal using the back clamping point stranded

16 ... 120 mm<sup>2</sup>  
16 ... 120 mm<sup>2</sup>  
10 ... 120 mm<sup>2</sup>  
16 ... 70 mm<sup>2</sup>  
16 ... 120 mm<sup>2</sup>  
6 ... 250 kcmil  
max. 1x 95 mm<sup>2</sup>, 1x 120 mm<sup>2</sup>  
max. 1x 95 mm<sup>2</sup>, 1x 120 mm<sup>2</sup>  
max. 1x 95 mm<sup>2</sup>, 1x 120 mm<sup>2</sup>  
max. 2x 120 mm<sup>2</sup>  
16 ... 120 mm<sup>2</sup>  
10 ... 120 mm<sup>2</sup>  
16 ... 120 mm<sup>2</sup>

**type of connectable conductor cross-sections**

- at AWG cables for main current circuit solid
- for DIN cable lug for main contacts stranded
- for DIN cable lug for main contacts finely stranded

4 ... 250 kcmil  
16 ... 95 mm<sup>2</sup>  
25 ... 120 mm<sup>2</sup>

**type of connectable conductor cross-sections**

- for control circuit solid
- for control circuit finely stranded with core end processing
- at AWG cables for control circuit solid

1x (0.5 ... 4.0 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)  
1x (0.5 ... 2.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)  
1x (20 ... 12), 2x (20 ... 14)

**wire length**

- between soft starter and motor maximum
- at the digital inputs at AC maximum

800 m  
1 000 m

**tightening torque**

- for main contacts with screw-type terminals
- for auxiliary and control contacts with screw-type terminals

10 ... 14 N·m  
0.8 ... 1.2 N·m

**tightening torque [lbf-in]**

- for main contacts with screw-type terminals
- for auxiliary and control contacts with screw-type terminals

89 ... 124 lbf-in  
7 ... 10.3 lbf-in

**Ambient conditions**

installation altitude at height above sea level maximum

5 000 m; derating as of 1000 m, see Manual

**ambient temperature**

- during operation

-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above

<ul style="list-style-type: none"> <li>during storage and transport</li> </ul> <b>environmental category</b> <ul style="list-style-type: none"> <li>during operation according to IEC 60721</li> <li>during storage according to IEC 60721</li> <li>during transport according to IEC 60721</li> </ul> <b>EMC emitted interference</b>	-40 ... +80 °C  3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A
--	---

**Communication/ Protocol**

<b>communication module is supported</b> <ul style="list-style-type: none"> <li>PROFINET standard</li> <li>EtherNet/IP</li> <li>Modbus RTU</li> <li>Modbus TCP</li> <li>PROFIBUS</li> </ul>	Yes Yes Yes Yes Yes
---	---------------------------------

**UL/CSA ratings**

<b>manufacturer's article number</b> <ul style="list-style-type: none"> <li><b>of circuit breaker</b> <ul style="list-style-type: none"> <li>— usable for Standard Faults at 460/480 V according to UL</li> </ul> </li> <li><b>of the fuse</b> <ul style="list-style-type: none"> <li>— usable for Standard Faults up to 575/600 V according to UL</li> <li>— usable for High Faults up to 575/600 V according to UL</li> </ul> </li> </ul> <b>operating power [hp] for 3-phase motors</b> <ul style="list-style-type: none"> <li>at 200/208 V at 50 °C rated value</li> <li>at 220/230 V at 50 °C rated value</li> <li>at 460/480 V at 50 °C rated value</li> </ul>	Siemens type: 3VA5225, max. 250 A; Iq = 10 kA  Type: Class RK5 / K5, max. 350 A; Iq = 10 kA  Type: Class J, max. 350 A; Iq = 100 kA  40 hp 40 hp 100 hp
--	---

**Safety related data**

<b>protection class IP on the front according to IEC 60529</b>	IP00; IP20 with cover
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front with cover

**ATEX**

<b>certificate of suitability</b> <ul style="list-style-type: none"> <li>ATEX</li> <li>IECEX</li> <li>UKEX</li> </ul> <b>hardware fault tolerance according to IEC 61508 relating to ATEX</b> <b>PFDavg with low demand rate according to IEC 61508 relating to ATEX</b> <b>PFHD with high demand rate according to EN 62061 relating to ATEX</b> <b>Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX</b> <b>T1 value for proof test interval or service life according to IEC 61508 relating to ATEX</b>	Yes Yes Yes 0 0.09 9E-6 1/h SIL1 3 a
---	---

**Certificates/ approvals**

General Product Approval	For use in hazardous locations
--------------------------	--------------------------------



[Confirmation](#)



For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
--------------------------------	---------------------------	-------------------	-------------------



[Explosion Protection Certificate](#)



[Type Test Certificates/Test Report](#)





[Confirmation](#)

## Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5055-6AB14>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5055-6AB14>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5055-6AB14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5055-6AB14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5055-6AB14&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current



<https://support.industry.siemens.com/cs/ww/en/ps/3RW5055-6AB14/char>


Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5055-6AB14&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

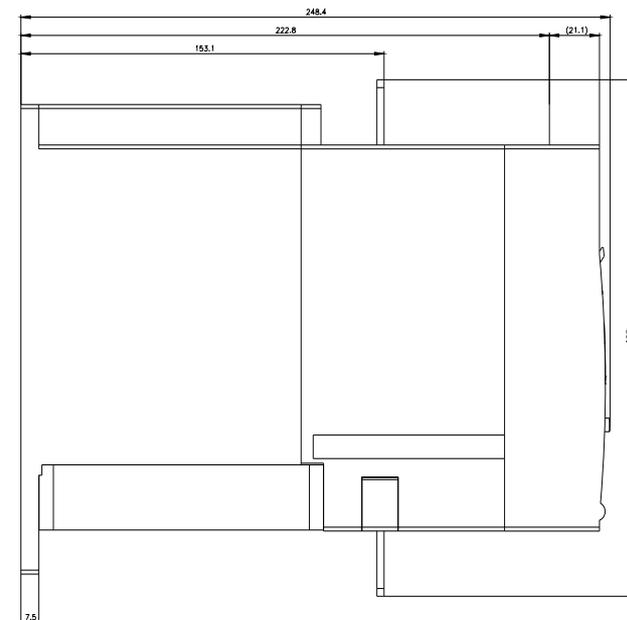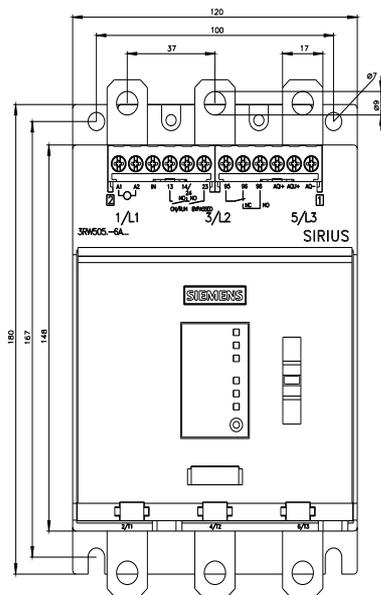

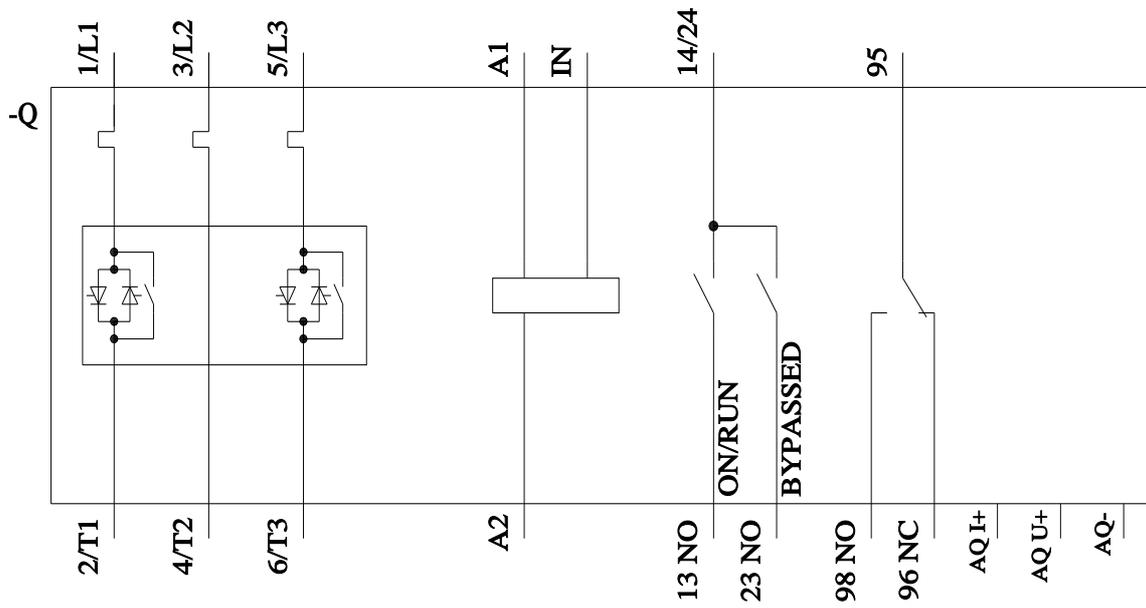

last modified:

1/14/2023 

