

SITOR fuse switch 10x 38, Up to 32 A, 690 V AC, 2-pole



| Model                                                  |                                                               |
|--------------------------------------------------------|---------------------------------------------------------------|
| product brand name                                     | SITOR                                                         |
| product designation                                    | SITOR fuse switch disconnecter                                |
| design of the actuating element                        | swivel knob                                                   |
| General technical data                                 |                                                               |
| number of poles                                        | 2                                                             |
| size of fuse link                                      | 10x38                                                         |
| utilization category                                   | According to IEC 60947-3; AC 22B/32 A/400 V; AC22B/10 A/690 V |
| size of the fuse link                                  | 10 x 38 mm                                                    |
| operating voltage                                      |                                                               |
| • at AC rated value maximum                            | 690 V                                                         |
| • at DC rated value maximum                            | 800 V                                                         |
| Protection class                                       |                                                               |
| protection class IP on the front                       | IP20                                                          |
| Main circuit                                           |                                                               |
| operational current rated value                        | 32 A                                                          |
| Suitability                                            |                                                               |
| suitability for use                                    |                                                               |
| • main switch                                          | No                                                            |
| • switch disconnecter                                  | Yes                                                           |
| • EMERGENCY OFF switch                                 | No                                                            |
| • safety switch                                        | Yes                                                           |
| Product function                                       |                                                               |
| product function fuse monitoring                       | No                                                            |
| Connections                                            |                                                               |
| connectable conductor cross-section solid              |                                                               |
| • minimum                                              | 1.5 mm <sup>2</sup>                                           |
| • maximum                                              | 25 mm <sup>2</sup>                                            |
| type of electrical connection for main current circuit | screw-type terminals                                          |
| Mechanical Design                                      |                                                               |
| height                                                 | 58 mm                                                         |
| depth                                                  | 85 mm                                                         |
| fastening method                                       |                                                               |
| • floor mounting                                       | No                                                            |
| • rail mounting                                        | No                                                            |
| net weight                                             | 103 g                                                         |
| Approvals Certificates                                 |                                                               |
| General Product Approval                               |                                                               |



[Confirmation](#)



General Product Approval

other

Environment



[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)

[Environmental Con-  
firmations](#)

Environment

[Environmental Con-  
firmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NC1092>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NC1092>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NC1092](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NC1092)


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

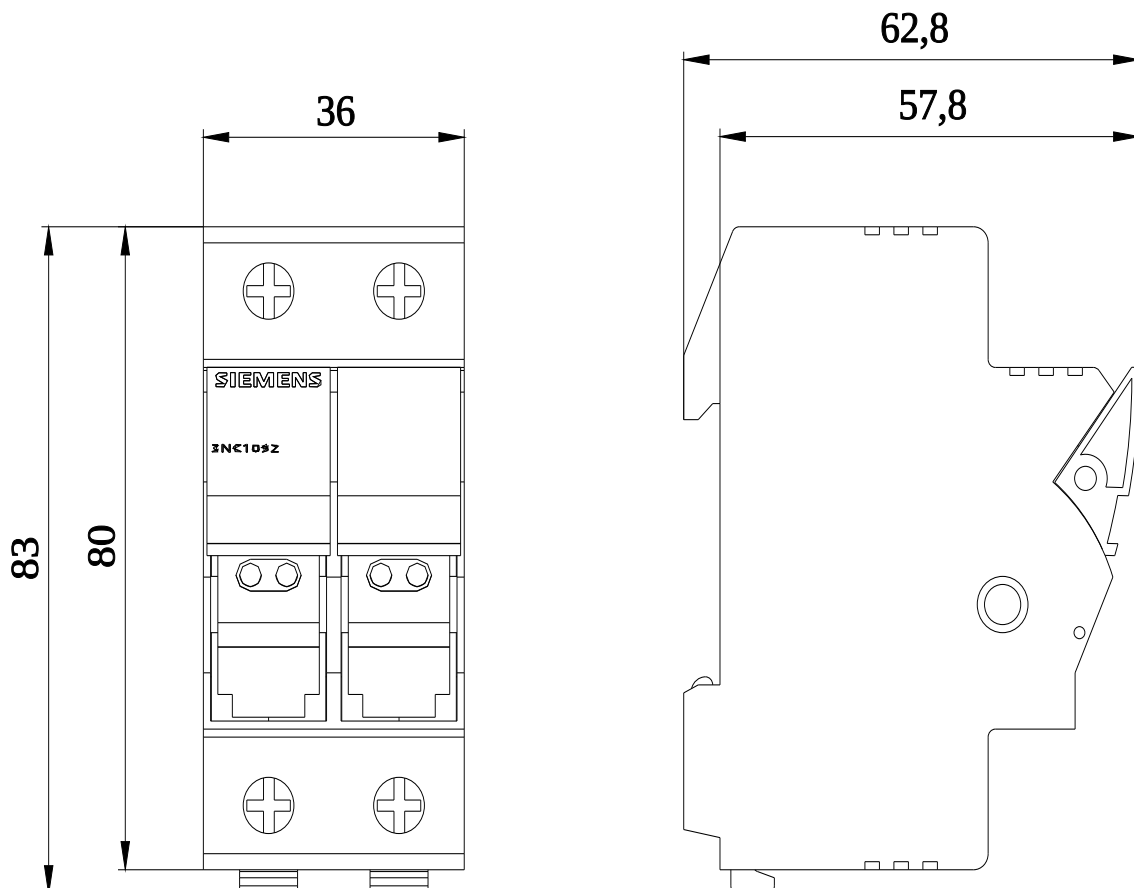

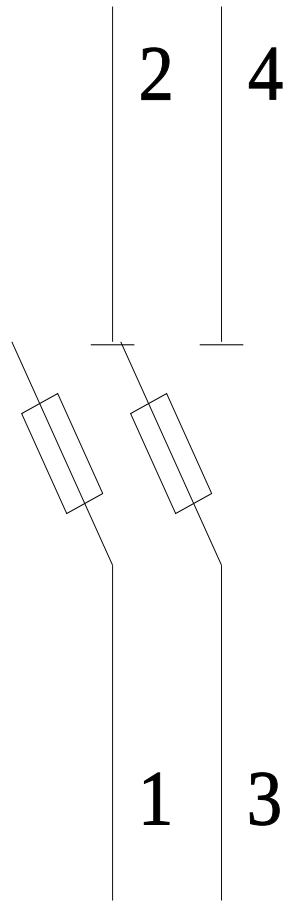

---

last modified:

4/20/2023 

