



RCBO compact 1P+N 6 kA type A 30 mA B13

| Model                                                                             |                                                                         |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| product brand name                                                                | SENTRON                                                                 |
| product designation                                                               | RCBO                                                                    |
| design of the product                                                             | Instantaneous                                                           |
| General technical data                                                            |                                                                         |
| number of poles                                                                   | 2                                                                       |
| number of poles with protection                                                   | 1                                                                       |
| design of pole                                                                    | 1P+N                                                                    |
| tripping characteristic class                                                     | B                                                                       |
| mechanical service life (operating cycles) typical                                | 10 000                                                                  |
| overvoltage category                                                              | III                                                                     |
| degree of pollution                                                               | 2                                                                       |
| Voltage                                                                           |                                                                         |
| type of voltage of the operating voltage                                          | AC                                                                      |
| insulation voltage (Ui) rated value                                               | 253 V                                                                   |
| surge voltage resistance rated value                                              | 4 000 V                                                                 |
| surge current resistance at (8/20) µs                                             | 1 kA                                                                    |
| Supply voltage                                                                    |                                                                         |
| supply voltage                                                                    |                                                                         |
| • at AC rated value                                                               | 230 V                                                                   |
| • for testing equipment minimum                                                   | 195 V                                                                   |
| operating frequency                                                               | 50 Hz                                                                   |
| supply voltage frequency rated value                                              | 50 Hz                                                                   |
| Protection class                                                                  |                                                                         |
| protection class IP                                                               | IP20, if the distribution board is installed, with connected conductors |
| Switching capacity                                                                |                                                                         |
| short-circuit current breaking capacity (Icn) according to EN 61009-1 rated value | 6 kA                                                                    |
| switching capacity current                                                        |                                                                         |
| • according to EN 60898 rated value                                               | 6 kA                                                                    |
| • according to IEC 60947-2 rated value                                            | 15 kA                                                                   |
| residual switching capacity (IΔm) according to IEC 61009-1                        | 4.5 kA                                                                  |
| energy limitation class                                                           | 3                                                                       |
| Dissipation                                                                       |                                                                         |
| power loss [W]                                                                    |                                                                         |
| • maximum                                                                         | 2.6 W                                                                   |
| operational current                                                               |                                                                         |
| • at 30 °C rated value                                                            | 13 A                                                                    |
| • at 40 °C rated value                                                            | 12.35 A                                                                 |
| • at 45 °C rated value                                                            | 11.96 A                                                                 |

- at 50 °C rated value 11.57 A
- at 55 °C rated value 11.18 A
- at 60 °C rated value 10.79 A
- at 65 °C rated value 10.4 A
- at 70 °C rated value 10.01 A

#### Product details

|                 |     |
|-----------------|-----|
| product feature |     |
| • halogen-free  | Yes |
| • silicon-free  | Yes |

#### Connections

|                                                                              |                      |
|------------------------------------------------------------------------------|----------------------|
| connectable conductor cross-section solid                                    |                      |
| • minimum                                                                    | 0.75 mm <sup>2</sup> |
| • maximum                                                                    | 16 mm <sup>2</sup>   |
| connectable conductor cross-section stranded                                 |                      |
| • minimum                                                                    | 0.75 mm <sup>2</sup> |
| • maximum                                                                    | 16 mm <sup>2</sup>   |
| connectable conductor cross-section finely stranded with core end processing |                      |
| • minimum                                                                    | 0.75 mm <sup>2</sup> |
| • maximum                                                                    | 10 mm <sup>2</sup>   |
| tightening torque with screw-type terminals                                  |                      |
| • minimum                                                                    | 1.2 N·m              |
| • maximum                                                                    | 2 N·m                |
| position of power supply cord                                                | Either top or bottom |

#### Mechanical Design

|                               |       |
|-------------------------------|-------|
| height                        | 90 mm |
| width                         | 18 mm |
| depth                         | 77 mm |
| installation depth            | 70 mm |
| number of modular width units | 1     |
| mounting position             | any   |
| net weight                    | 117 g |
| weight with packaging         | 133 g |

#### Environmental conditions

|                                                                             |                   |
|-----------------------------------------------------------------------------|-------------------|
| influence of the surrounding temperature                                    | Max. 95% humidity |
| ambient temperature during operation                                        |                   |
| • minimum                                                                   | -25 °C            |
| • maximum                                                                   | 45 °C             |
| ambient temperature during storage                                          |                   |
| • minimum                                                                   | -40 °C            |
| • maximum                                                                   | 75 °C             |
| number of test cycles for environmental testing according to IEC 60068-2-30 | 28                |

#### General Product Approval

Declaration of  
Conformity

[Confirmation](#)



Declaration of  
Conformity

Test Certificates

other



EG-Konf.

[Special Test Certificate](#)

[Miscellaneous](#)

[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)

Dangerous Good

Environment

#### Further information

**Siemens has decided to exit the Russian market (see here).**

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SV1316-6KK13>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5SV1316-6KK13>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SV1316-6KK13](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV1316-6KK13)



**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

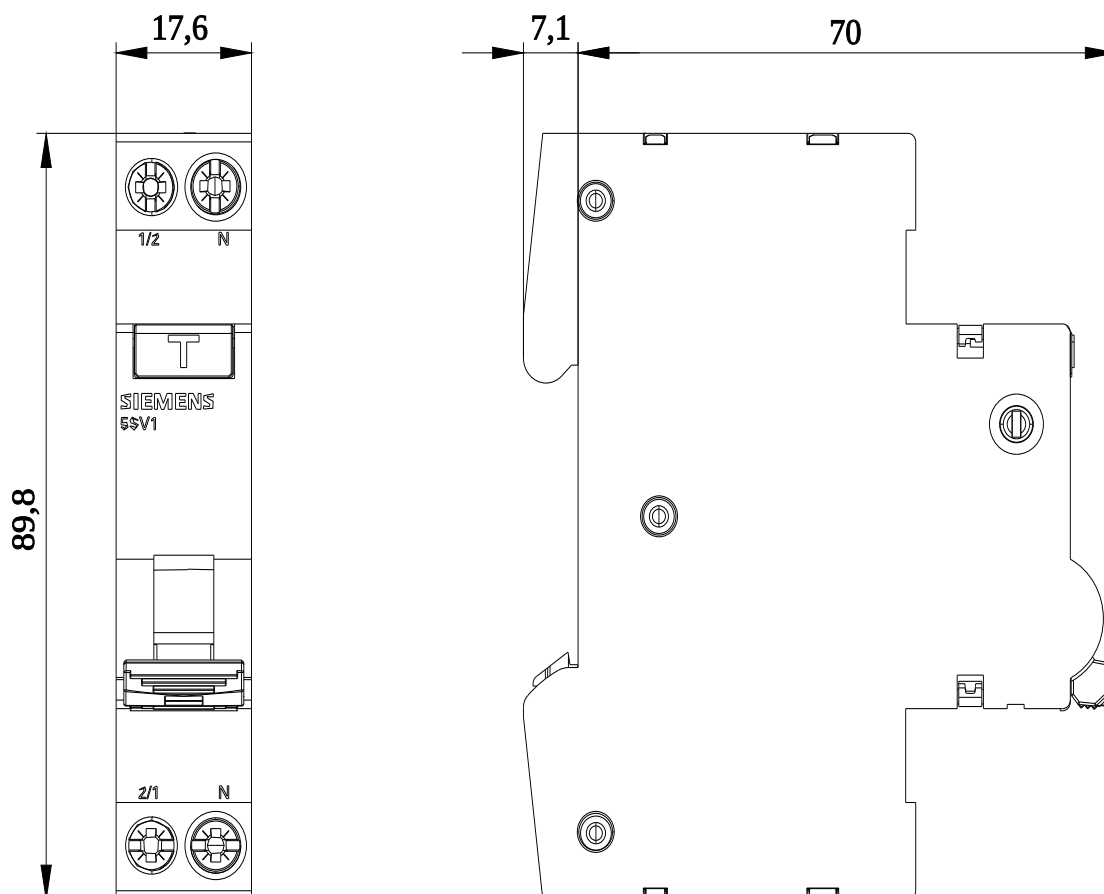

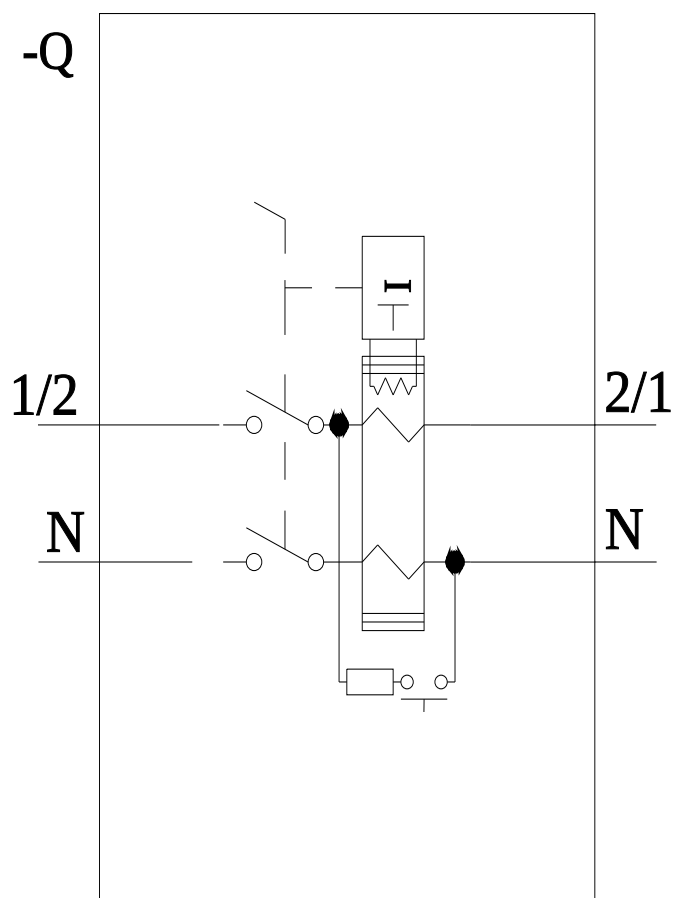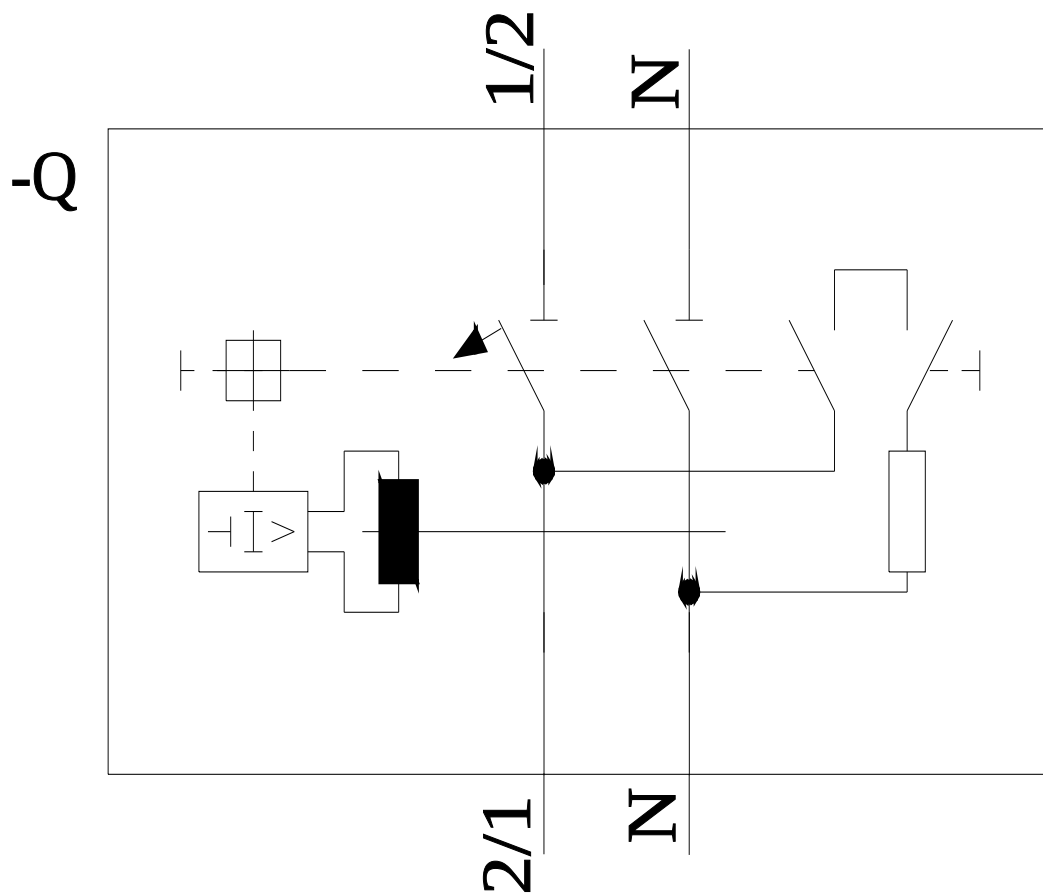

last modified:

3/1/2023

