

Accessory 3WA/3WL Undervoltage release (UVR) Instantaneous (0,08 s) and short-delay (0,2 s), 208-240 V AC / 220-250 V DC,

Model	
product brand name	SENTRON
product designation	Undervoltage release
design of the product	undervoltage release (UVR), instantaneous (0.08 s) and short-time delayed (0.2 s), 208 to 240 V AC / 220 to 250 V DC
closing apparent power [VA]	50 VA
operating apparent power [VA]	5 VA
closing active power [W]	50 W
operating active power [W]	5 W
OFF-delay time minimum	80 ms
OFF-delay time maximum	200 ms
opening time of circuit breaker at $U_s = 0\%$	73 ms
control supply voltage ( $U_s$ ) at AC rated value	208 to 240 V 50/60 Hz
design of the DIAZED fuse link gG/miniature circuit breaker with tripping characteristic class C 100% for short-circuit protection minimum permissible	1 A
ambient temperature during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C

### Approvals Certificates

General Product Approval		EMV	Test Certificates	
	 EG-Konf.	<a href="#">Confirmation</a>		 RCM
				<a href="#">Special Test Certificate</a>
Test Certificates	Marine / Shipping	other	Dangerous Good	
<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Miscellaneous</a>	 LRS	<a href="#">Confirmation</a>	<a href="#">Transport Information</a>
				<a href="#">Dangerous Goods Information</a>

### Further information

Siemens has decided to exit the Russian market (see here).  
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>  
 Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AE06>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AE06>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WA9111-0AE06](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AE06)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

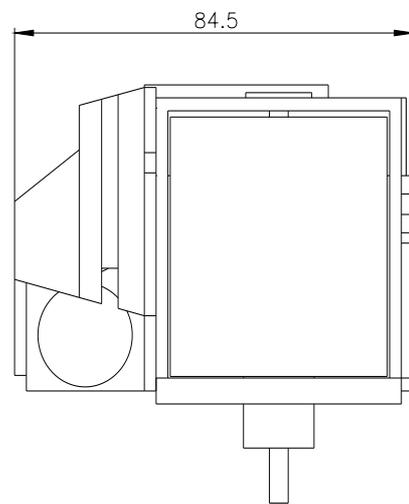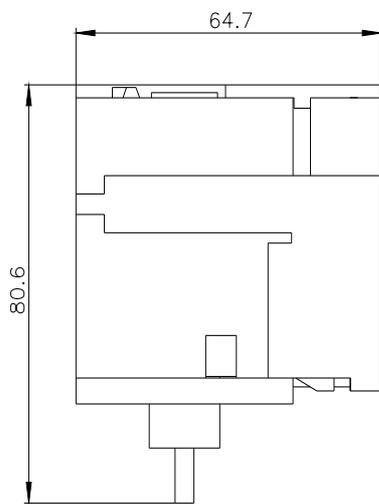

last modified:

8/12/2023 

