

Accessory for 3KC4, 3KC8 Auxiliary switch contains 2 change-over contacts: 1 change-over contact for POS I, II for 800-1600 A leading contains 1 unit incl. set of screws



Model	
product brand name	SENTRON
product designation	Accessories for transfer switching equipment
Auxiliary circuit	
number of CO contacts of auxiliary contacts instantaneous contact	0
number of NC contacts for auxiliary contacts instantaneous contact	0
number of NO contacts for auxiliary contacts instantaneous contact	0
operational current of auxiliary contacts	
• at AC-12 at 230 V	16 A
• at AC-15 at 230 V	4 A
Suitability	
suitability for use	3KC4
Product details	
product description	Auxiliary switch with 2 CO contacts: One for position I and II, leading, AC1 2 A 250 V AC
Connections	
type of electrical connection	0.2 to 2.5 mm ²
• for auxiliary and control circuit	Box terminal
Mechanical Design	
fastening method	screw fixing
net weight	140 g
Approvals Certificates	
General Product Approval	



[Confirmation](#)

[Miscellaneous](#)



Test Certificates	other	Environment	
Type Test Certificates/Test Report	Miscellaneous	Confirmation	Environmental Confirmations

Further information
Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KC9803-2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KC9803-2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KC9803-2

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

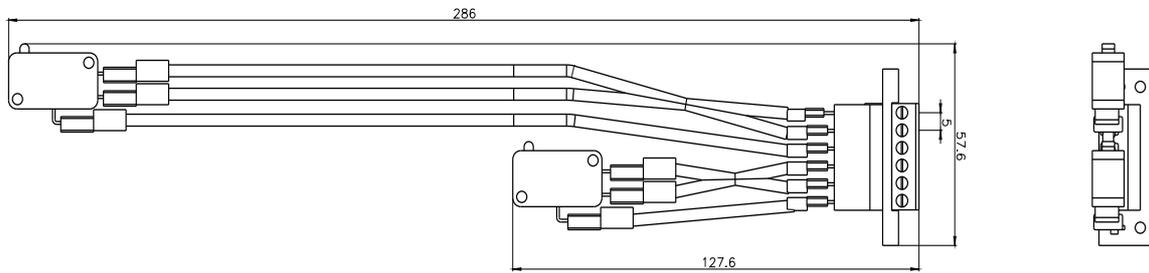

last modified:

12/19/2020

