



SETRON, ATE, transfer switching equipment 3KC, automatically, ATSE, 3- pole, Iu: 3200 A, Ue AC: 415 V, Ie at AC-33 B at 415 V: 1250 A, screw mounting, motorized operating mechanism, at the right end, long handle, busbar connection

Model	
product brand name	SETRON
product line	ATE
product designation	3KC transfer switching equipment
design of the product	automatic
display version for switch position indicator manual operation	I - O - II
design of the actuating element	Long rotary knob
design of handle	Handle
type of the driving mechanism	motorized operating mechanism
type of the driving mechanism motor drive	Yes
General technical data	
number of poles	3
type of device	fixed mounting
mechanical service life (operating cycles) for function sequence O-I-O typical	1 500
position of the switch operating mechanism	at the right end
overvoltage category	III
degree of pollution	3
insulation voltage	
• rated value	1 000 V
Supply voltage	
supply voltage at AC	
• minimum	166 V
• maximum	332 V
Protection class	
protection class IP	IP00
protection class IP	
• with closed switch with cover or cable lug cover	IP20
• on the front	IP00
Dissipation	
power loss [W]	
• with conventional rated thermal current per device	990 W
Main circuit	
operating frequency rated value	
• minimum	45 Hz
• maximum	65 Hz
operational current rated value	3 200 A
Auxiliary circuit	
number of connected NC contacts for auxiliary contacts	0
number of connected NO contacts for auxiliary contacts	3

number of connected CO contacts for auxiliary contacts	4
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
suitability for use	
• main switch	Yes
• switch disconnecter	Yes
• EMERGENCY OFF switch	No
• safety switch	Yes
• maintenance/repair switch	Yes
product extension auxiliary switch	No
product extension optional	
• motor drive	No
• voltage trigger	No

Short circuit

short-circuit current making capacity (I _{cm}) for switch disconnecter	
• at 415 V AC without fuse link according to IEC 60947-3 rated value minimum	105 kA
• at 415 V AC without fuse link according to IEC 60947-6-1 rated value minimum	105 kA
input current at digital input with signal <0> maximum	2.1 mA
number of digital inputs	11
• design of the switching input	Connected with control terminal
relay design	2 relays: 2NO, 2A 250 VAC or 2A 24 VDC; 1 relay: 1CO, 2A 250 VAC or 2A 24 VDC
pulse duration minimum	0.06 s
input delay time	0.046 s
number of monitored phases	3

Connections

type of connectable conductor cross-sections	
• for copper busbar	3x100x10
type of electrical connection	
• of the inputs and outputs	Removable/insertable
• for main current circuit	busbar connection

Mechanical Design

height	380 mm
width	596 mm
depth	569 mm
fastening method	screw fixing
fastening method	
• 4-hole front mounting	No
• front mounting with central attachment	No
• rail mounting	No
net weight	62 100 g

Environmental conditions

ambient temperature during operation	
• minimum	-20 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	70 °C

Approvals Certificates


General Product Approval



[Confirmation](#)

[Miscellaneous](#)

General Product Approval	Test Certificates	other	Dangerous Good	Environment
--------------------------	-------------------	-------	----------------	-------------

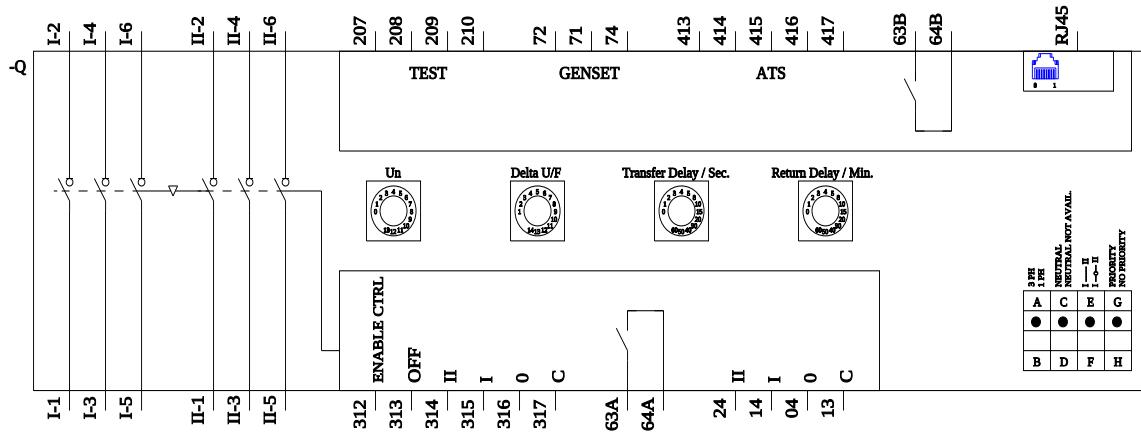

last modified:

9/7/2022

