



Position switch 3SE5162 Metal enclosure XL, 56 mm wide with twist lever 27 mm, made of metal/plastic roller 19 mm Device connection 3 x (M20 x 1.5) 2 x (1 NO/1 NC) Quick action contacts IP66/IP67

|   |  |
|---|--|
| <p><b>product brand name</b></p> <p><b>product designation</b></p> <p><b>product type designation</b></p> <p><b>manufacturer's article number</b></p> <ul style="list-style-type: none"> <li>• of the supplied basic switch</li> <li>• of the supplied actuator head for position switches</li> <li>• of the supplied operating lever</li> <li>• of the supplied switching contacts</li> <li>• of the supplied empty enclosure with cover</li> </ul> <p>suitability for use safety switch</p> | <p>SIRIUS</p> <p>Mechanical position switches</p> <p>3SE5</p> <p><a href="#">3SE5162-0CA00</a></p> <p><a href="#">3SE5000-0AH00</a></p> <p><a href="#">3SE5000-0AA01</a></p> <p>1x 3SE5000-0CA00, 1x 3SE5060-0CA00</p> <p><a href="#">3SE5162-0AA00</a></p> <p>Yes</p> |
|---|--|

### General technical data

|   |   |
|---|---|
| <p>product function positive opening</p> <p>insulation voltage rated value</p> <p>degree of pollution</p> <p>surge voltage resistance rated value</p> <p>protection class IP</p> <p>shock resistance</p> <ul style="list-style-type: none"> <li>• according to IEC 60068-2-27</li> </ul> <p>vibration resistance according to IEC 60068-2-6</p> <p>mechanical service life (operating cycles) typical</p> <p>electrical endurance (operating cycles) at AC-15 at 230 V typical</p> <p>electrical endurance (operating cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical</p> <p>Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026</p> <p>thermal current</p> <p>material of the enclosure of the switch head</p> <p>reference code according to IEC 81346-2</p> <p>continuous current of the C characteristic MCB</p> <p>continuous current of the quick DIAZED fuse link</p> <p>continuous current of the DIAZED fuse link gG</p> <p>active principle</p> <p>repeat accuracy</p> <p>Substance Prohibitance (Date)</p> <p>minimum actuating torque in directions of actuation</p> <p>length of the sensor</p> <p>width of the sensor</p> | <p>Yes</p> <p>400 V</p> <p>class 3</p> <p>6 kV</p> <p>IP66/IP67</p> <p>30g / 11 ms</p> <p>0.35 mm/5g</p> <p>5 000 000</p> <p>100 000</p> <p>5 000 000</p> <p>6 000</p> <p>10 A</p> <p>plastic</p> <p>B</p> <p>1 A; for a short-circuit current smaller than 400 A</p> <p>10 A; for a short-circuit current smaller than 400 A</p> <p>6 A</p> <p>mechanical</p> <p>0.05 mm</p> <p>07/01/2006</p> <p>0.3 N·m</p> <p>149.5 mm</p> <p>56 mm</p> |
|---|---|

### Ambient conditions

|   |                       |
|---|-----------------------|
| <p>ambient temperature</p> <ul style="list-style-type: none"> <li>• during operation</li> </ul> | <p>-25 ... +85 °C</p> |
|---|-----------------------|

|  |                |
|--|----------------|
| <ul style="list-style-type: none"> <li>during storage</li> </ul>       | -40 ... +90 °C |
| <b>explosion protection category for dust</b>                          | none           |
| <b>design of the switching contact</b>                                 | mechanical     |
| <b>operating frequency rated value</b>                                 | 50 ... 60 Hz   |
| <b>number of NC contacts for auxiliary contacts</b>                    | 2              |
| <b>number of NO contacts for auxiliary contacts</b>                    | 2              |
| <b>operational current at AC-15</b>                                    |                |
| <ul style="list-style-type: none"> <li>at 24 V rated value</li> </ul>  | 6 A            |
| <ul style="list-style-type: none"> <li>at 125 V rated value</li> </ul> | 6 A            |
| <ul style="list-style-type: none"> <li>at 240 V rated value</li> </ul> | 6 A            |
| <ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul> | 4 A            |
| <b>operational current at DC-13</b>                                    |                |
| <ul style="list-style-type: none"> <li>at 24 V rated value</li> </ul>  | 3 A            |
| <ul style="list-style-type: none"> <li>at 125 V rated value</li> </ul> | 0.55 A         |
| <ul style="list-style-type: none"> <li>at 250 V rated value</li> </ul> | 0.27 A         |
| <ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul> | 0.12 A         |

### Enclosure

|  |                      |
|--|----------------------|
| <b>design of the housing</b>                       | block, wide          |
| <b>material of the enclosure</b>                   | metal                |
| <b>coating of the enclosure</b>                    | cathodic dip coating |
| <b>design of the housing according to standard</b> | No                   |

### Drive Head

|  |   |
|--|---|
| <b>design of the actuating element</b>             | Twist lever, metal lever, 27 mm long, step 9 mm, plastic roller 19 mm |
| <b>standard-compliant actuator head</b>            | EN 50041, design A  |
| <b>shape of the switch head</b>                    | roller  |
| <b>design of the switching function</b>            | positive opening  |
| <b>circuit principle</b>                           | snap-action contacts  |
| <b>number of switching contacts safety-related</b> | 2   |
| <b>cable entry type</b>                            | 3x (M20 x 1.5)  |

### Installation/ mounting/ dimensions

|                          |              |
|--------------------------|--------------|
| <b>mounting position</b> | any          |
| <b>fastening method</b>  | screw fixing |

### Connections/ Terminals

|  |   |
|--|---|
| <b>type of electrical connection</b>   | screw-type terminals  |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>solid</li> </ul>                                    | 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 0.75 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul> | 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 0.75 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>at AWG cables solid</li> </ul>                      | 1x (20 ... 16), 2x (20 ... 18)  |
| <ul style="list-style-type: none"> <li>at AWG cables stranded</li> </ul>                   | 1x (20 ... 16), 2x (20 ... 18)  |
| <b>design of the interface for safety-related communication</b>                            | without   |

### Communication/ Protocol

|                                |         |
|--------------------------------|---------|
| <b>design of the interface</b> | without |
|--------------------------------|---------|

### Certificates/ approvals

#### General Product Approval



[Confirmation](#)



|  |                                  |                          |              |
|--|----------------------------------|--------------------------|--------------|
| <b>Functional Safety/Safety of Machinery</b> | <b>Declaration of Conformity</b> | <b>Test Certificates</b> | <b>other</b> |
|--|----------------------------------|--------------------------|--------------|

[Type Examination Certificate](#)



EG-Konf.

[Type Test Certificates/Test Report](#)

[Confirmation](#)

### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3SE5162-0CH01>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3SE5162-0CH01>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5162-0CH01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3SE5162-0CH01&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SE5162-0CH01&lang=en)

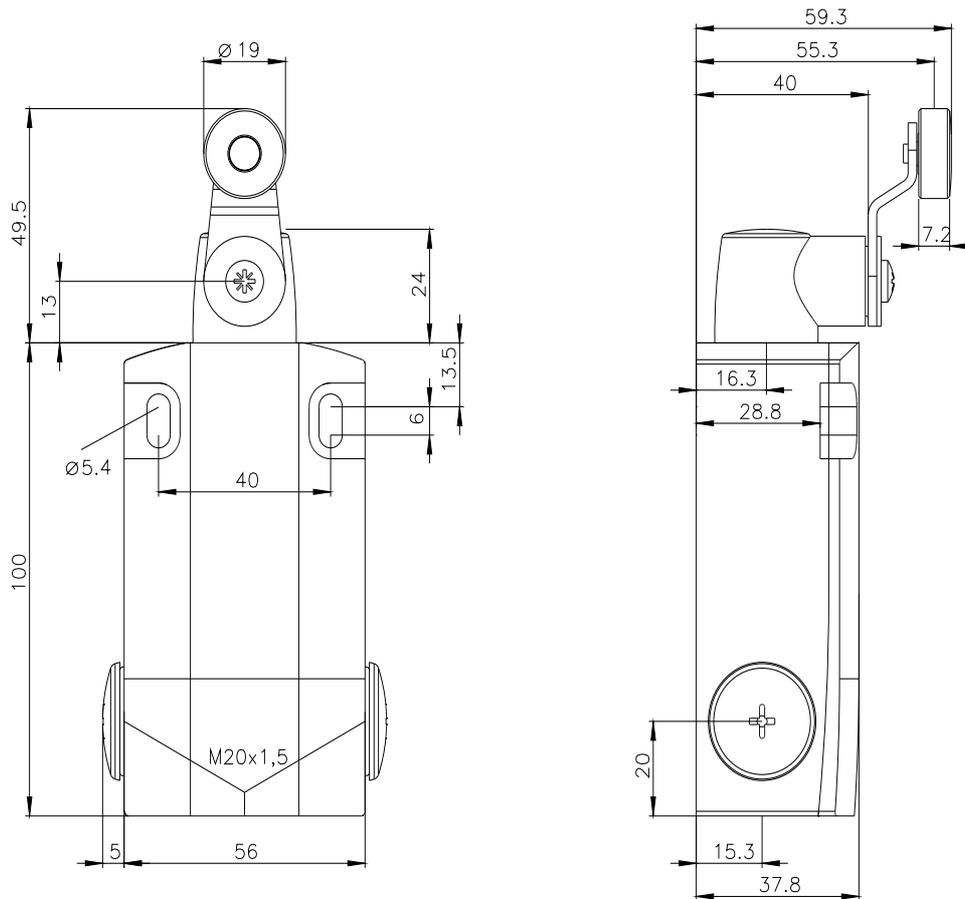

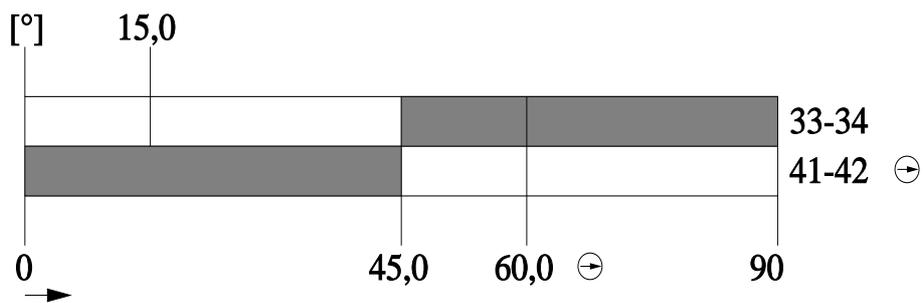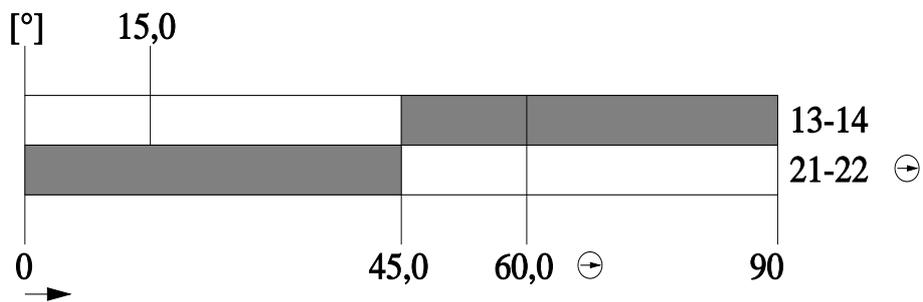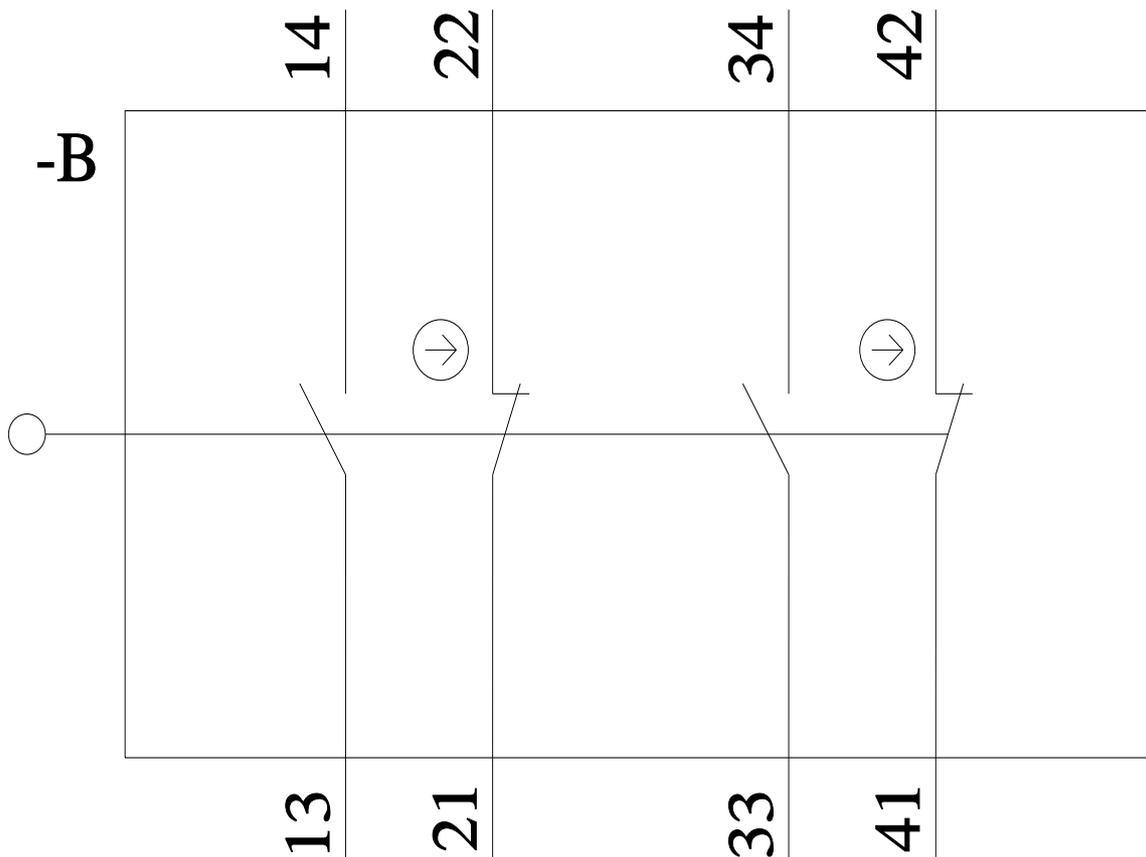

last modified:

1/26/2022