


Box terminal for contactor 3RT1054 size S6 Max. connection approx. 70 mm<sup>2</sup>

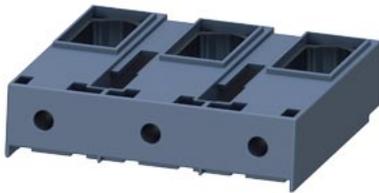

|                               |   |
|-------------------------------|---|
| product brand name            | SIRIUS  |
| product designation           | Box terminal block  |
| design of the product         | up to 70 mm <sup>2</sup> , can be used for 3UF71.3-1BA00-0 or 3RW443. |
| Substance Prohibitance (Date) | 07/01/2006  |

**Connections/ Terminals**

|   |  |
|---|--|
| type of connectable conductor cross-sections for main contacts  |  |
| <ul style="list-style-type: none"> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul> | max. 1x 50, 1x 70 mm <sup>2</sup><br>max. 1x 50, 1x 70 mm <sup>2</sup> |

**Certificates/ approvals**

| General Product Approval | EMC | Declaration of Conformity |
|--------------------------|-----|---------------------------|
|--------------------------|-----|---------------------------|

[Confirmation](#)



| Test Certificates | Marine / Shipping |
|-------------------|-------------------|
|-------------------|-------------------|

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



| Marine / Shipping | other |
|-------------------|-------|
|-------------------|-------|



[Confirmation](#)

[Miscellaneous](#)

**Further information**

Siemens has decided to exit the Russian market (see here).  
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.  
 Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1955-4G>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1955-4G>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1955-4G>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1955-4G&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1955-4G&lang=en)

Characteristic: Tripping characteristics,  $I^2t$ , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1955-4G/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1955-4G&objecttype=14&gridview=view1>

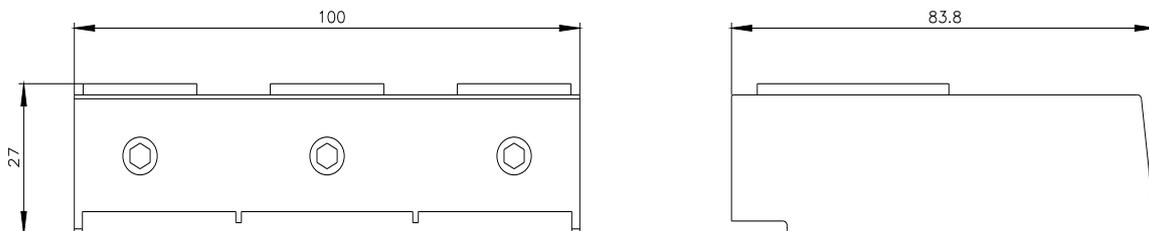

last modified:

3/4/2022 