



CorePro LED PLT 4P



CorePro LED PLT HF 9W 830 4P GX24q-3

The CorePro LED PLT 4P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly

Product data


General Information		Input Frequency	
Cap-Base	GX24Q-3 [GX24q-3]	Power Consumption	9 W
Nominal lifetime	30,000 hour(s)	Lamp Current (Max)	400 mA
Switching Cycle	200,000	Lamp Current (Min)	250 mA
Lighting Technology	LED	Starting Time (Nom)	0.5 s
Flux measurement reference	Sphere	Warm-up time to 60% light	0.5 s
CE mark	Yes	Power Factor (Fraction)	0.9
EU RoHS compliant	Yes	Voltage (Nom)	20-60 V
Light Technical		LED alternative to fluorescent lamp power	26 W
Color Code	830 [CCT of 3000K]	Max. lamp no. on MCB B type 10A - Mains	-
Beam Angle (Nom)	120 degree(s)	Max. lamp no. on MCB B type 10A – EM ballast without Comp. Cap.	-
Luminous Flux	990 lm	Max. lamp no. on MCB B type 10A – EM ballast with Comp. Cap.	-
Color Designation	White (WH)	Max. lamp no. on MCB B type 16A - Mains	-
Correlated Color Temperature (Nom)	3000 K	Max. lamp no. on MCB B type 16A – EM ballast without Comp. Cap.	-
Luminous Efficacy (rated) (Nom)	110 lm/W	Max. lamp no. on MCB B type 16A – EM ballast with Comp. Cap.	-
Color Consistency	<6	Temperature	
Color rendering index (CRI)	82	Ambient temperature range	-20 °C to 35 °C
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Photobiological safety according to EN 62471	RG1		
Operating and Electrical			
Line Frequency	20K-80K Hz		

CorePro LED PLT 4P

T-Case Maximum (Nom)	65 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	100 mm
Bulb Shape	PL-T
Approval and Application	
Energy Efficiency Class	F
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	9 kWh


EPREL Registration Number	1361422
Product Data	
Order product name	CorePro LED PLT HF 9W 830 4P GX24q-3
Full product name	CorePro LED PLT HF 9W 830 4P GX24q-3
Full product code	871951448780200
Order code	929003576502
Material Nr. (12NC)	929003576502
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514487802
Numerator - Packs per outer box	20
EAN/UPC - Case	8719514487819

Dimensional drawing




Product	D1	D2	A1	A2	A3
CorePro LED PLT HF 9W 830 4P GX24q-3	42 mm		115 mm	127 mm	142 mm

Photometric data

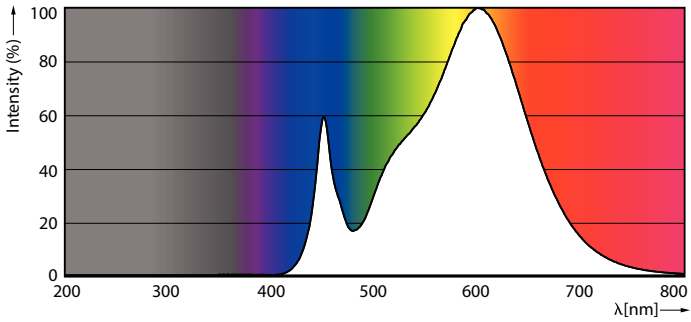


Spectral Power Distribution Colour



Light Distribution Diagram

CorePro LED PLT 4P



Photometric data



General Uniform Lighting - CorePro LED PLT HF 9W 830 4P GX24q-3



General uniform lighting - CorePro LED PLT HF 9W 830 4P GX24q-3

Lifetime

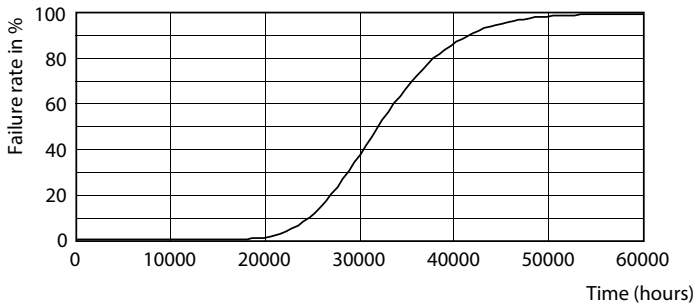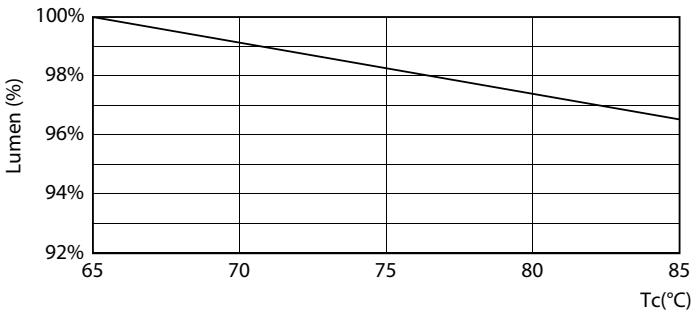

Lumen Maintenance Diagram

Life Expectancy Diagram - CorePro LED PLT HF 9W 830 4P GX24q-3

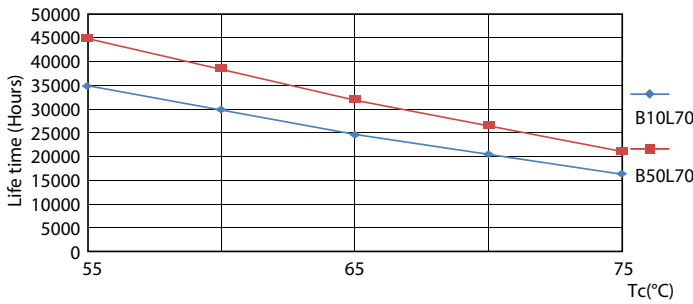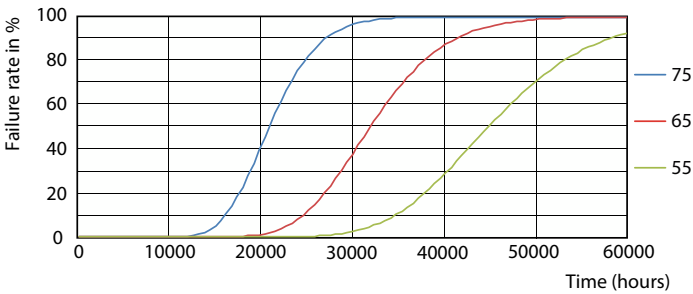

Life Expectancy Diagram - CorePro LED PLT HF 9W 830 4P GX24q-3

Life Expectancy Diagram - CorePro LED PLT HF 9W 830 4P GX24q-3

CorePro LED PLT 4P

Lifetime



Lumen Maintenance Diagram - CorePro LED PLT HF 9W 830 4P GX24q-3

