



CorePro Plastic LEDbulbs

CorePro LEDbulb ND 10-75W A60 E27 865

The CorePro LED bulb is the perfect bulb for your basic lighting needs. It provides beautiful light and dependable performance you expect from LED at an affordable price. CorePro LEDbulbs are compatible with existing fixtures with an E27 or B22 holder and are designed for retrofit replacement of incandescent bulbs. They deliver huge energy savings of 80% and provides excellent quality of light. By offering a lifetime of 15,000 hours it reduces maintenance costs.

Product data

| General Information | |
|---------------------------------------|--------------------|
| Cap-Base | E27 [E27] |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 50,000 |
| Lighting Technology | LED |
| Flux measurement reference | Sphere |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| Light Technical | |
| Color Code | 865 [CCT of 6500K] |
| Beam Angle (Nom) | 180 degree(s) |
| Luminous Flux | 1,055 lm |
| Color Designation | Cool Daylight |
| Correlated Color Temperature (Nom) | 6500 K |
| Luminous Efficacy (rated) (Nom) | 105 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |

| Flickering value (PstLM) | 1 |
|--|-----------------|
| Stroboscopic effect value (SVM) | 0.4 |
| Photobiological safety according to EN 62471 | RG1 |
| Operating and Electrical | |
| Line Frequency | 50 to 60 Hz |
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 10 W |
| Lamp Current (Nom) | 90 mA |
| Wattage Equivalent | 75 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.54 |
| Voltage (Nom) | 220-240 V |
| Temperature | |
| Ambient temperature range | -20 °C to 45 °C |
| T-Case Maximum (Nom) | 85 °C |

CorePro Plastic LEDbulbs

Controls and Dimming

| | |
|----------|----|
| Dimmable | No |
|----------|----|

Mechanical and Housing

| | |
|---------------|--------------|
| Bulb Finish | Frosted |
| Bulb Material | Plastic |
| Bulb Shape | A60 [A 60mm] |


Approval and Application

| | |
|-------------------------------|--------|
| Energy Efficiency Class | F |
| Energy Consumption kWh/1000 h | 10 kWh |
| EPREL Registration Number | 696292 |
| EyeComfort | Yes |

Product Data


| | |
|---------------------------------|---------------------------------------|
| Order product name | CorePro LEDbulb ND 10-75W A60 E27 865 |
| Full product name | CorePro LEDbulb ND 10-75W A60 E27 865 |
| Full product code | 872016916923400 |
| Order code | 929002306708 |
| Material Nr. (12NC) | 929002306708 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8720169169234 |
| Numerator - Packs per outer box | 10 |
| EAN/UPC - Case | 8720169169241 |

Dimensional drawing

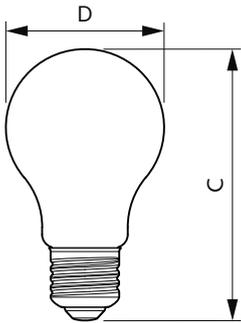


| Product | D | C |
|---------------------------------------|-------|--------|
| CorePro LEDbulb ND 10-75W A60 E27 865 | 60 mm | 108 mm |

Photometric data

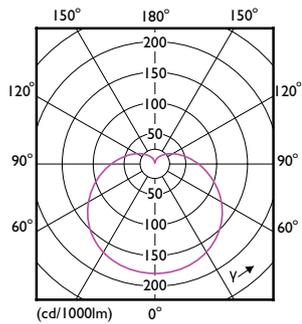


Light Distribution Diagram - CorePro LEDbulb ND 10-75W A60 E27 865

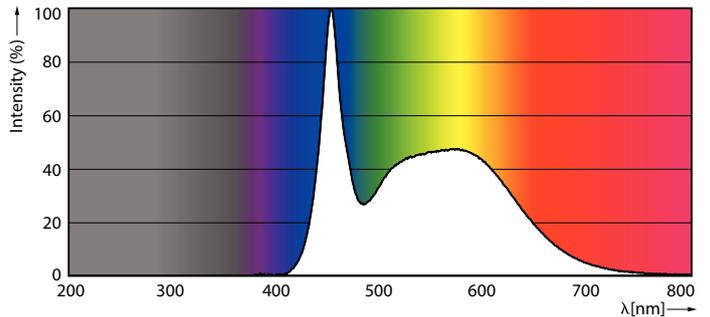

Spectral Power Distribution Colour - CorePro LEDbulb ND 10-75W A60 E27 865

CorePro Plastic LEDbulbs


Photometric data




General Parameters 41 Philips Lighting B.V. Page 10

General uniform lighting - CorePro LEDbulb ND 10-75W A60 E27 865

Lifetime

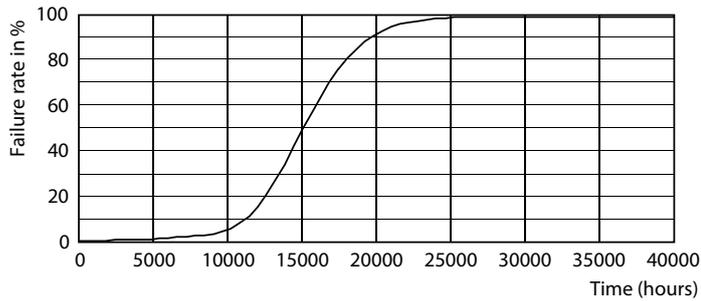

Life Expectancy Diagram - CorePro LEDbulb ND 10-75W A60 E27 865

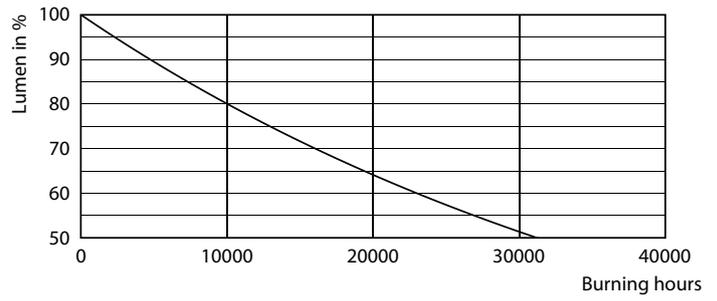

Lumen Maintenance Diagram - CorePro LEDbulb ND 10-75W A60 E27 865

