



ET 200pro ERSE/RSSE HF electronic reversing starter electronic (soft-) switching Full motor protection consisting of: electronic Overload protection + thermistor AC-3, 5.5 kW / 400 V 1.5 A...(9 A)12 A without brake contact 4 DI Han Q4/2 - Han Q8/0

product brand name	SIMATIC
product designation	Motor starters
design of the product	reversing starter
product type designation	ET 200pro
General technical data	
product function on-site operation	Yes
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
protection class IP	IP65
shock resistance	15g / 11 ms
mechanical service life (operating cycles) of the main contacts typical	30 000 000
type of assignment	1
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 Lead titanium zirconium oxide - 12626-81-2
product function	
• direct start	No
• reverse starting	Yes
product component motor brake output	No
product feature	
• brake control with 230 V AC	No
• brake control with 400 V AC	No
• brake control with 24 V DC	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
product function short circuit protection	Yes
design of short-circuit protection	fuse
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	100 000 A
Safety related data	
proportion of dangerous failures	
• with low demand rate according to SN 31920	50 %
• with high demand rate according to SN 31920	75 %
B10 value with high demand rate according to SN 31920	1 000 000

failure rate [FIT] with low demand rate according to SN 31920	100 FIT
Electrical Safety	
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
design of the switching contact	solid-state / thyristor / 2 phases
adjustable current response value current of the current-dependent overload release	1.5 ... 12 A
type of the motor protection	full motor protection
type of voltage	AC
operating voltage rated value	200 ... 400 V
operating range relative to the operating voltage at AC at 50 Hz	200 ... 440 V
operational current	
• at AC at 400 V rated value	12 A
• at AC-3 at 400 V rated value	12 A
operating power	
• at AC-3 at 400 V rated value	5 500 W
operating power for 3-phase motors at 400 V at 50 Hz	700 ... 5 500 W
Inputs/ Outputs	
product function	
• digital inputs parameterizable	Yes
• digital outputs parameterizable	No
number of digital inputs	4
number of sockets	
• for digital output signals	0
• for digital input signals	4
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 ... 24 V
supply voltage 1 at DC rated value	
• minimum permissible	20.4 V
• maximum permissible	28.8 V
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	20.4 ... 28.8 V
control supply voltage 1 at DC	
• rated value	20.4 ... 28.8 V
•	24 ... 24 V
power loss [W] in auxiliary and control circuit	
• in switching state OFF	
— with bypass circuit	1.656 W
— without bypass circuit	1.656 W
• in switching state ON	
— with bypass circuit	6.84 W
— without bypass circuit	5.328 W
Installation/ mounting/ dimensions	
mounting position	vertical, horizontal
fastening method	screw fixing
height	230 mm
width	110 mm
depth	160 mm
Ambient conditions	
installation altitude at height above sea level maximum	3 500 m
ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity during operation	5 ... 95 %
Communication/ Protocol	
protocol is supported	

<ul style="list-style-type: none"> • PROFIBUS DP protocol 	Yes
<ul style="list-style-type: none"> • PROFINET protocol 	Yes
design of the interface PROFINET protocol	Yes
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function	
<ul style="list-style-type: none"> • supports PROFenergy measured values 	Yes
<ul style="list-style-type: none"> • supports PROFenergy shutdown 	Yes
address space memory of address range	
<ul style="list-style-type: none"> • of the inputs 	2 byte
<ul style="list-style-type: none"> • of the outputs 	2 byte
type of electrical connection of the communication interface	via backplane bus

Connections/ Terminals

type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit 	tab terminals
type of electrical connection	
<ul style="list-style-type: none"> • 1 for digital input signals • 2 for digital input signals • 3 for digital input signals • 4 for digital input signals 	M12 socket M12 socket M12 socket M12 socket
type of electrical connection	
<ul style="list-style-type: none"> • at the manufacturer-specific device interface • for main energy infeed • for load-side outgoing feeder • for main energy transmission • for supply voltage line-side • for supply voltage transmission 	optical interface socket according to ISO23570 socket according to ISO23570 socket according to ISO23570 via backplane bus via backplane bus

UL/CSA ratings

operating voltage at AC at 60 Hz according to CSA and UL rated value	480 V
--	-------

Approvals Certificates

General Product Approval



EG-Konf.



[Confirmation](#)



CCC



UL



EMV	Test Certificates	other
-----	-------------------	-------



RCM

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS70-3AA0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5LS70-3AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5LS70-3AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5LS70-3AA0&lang=en

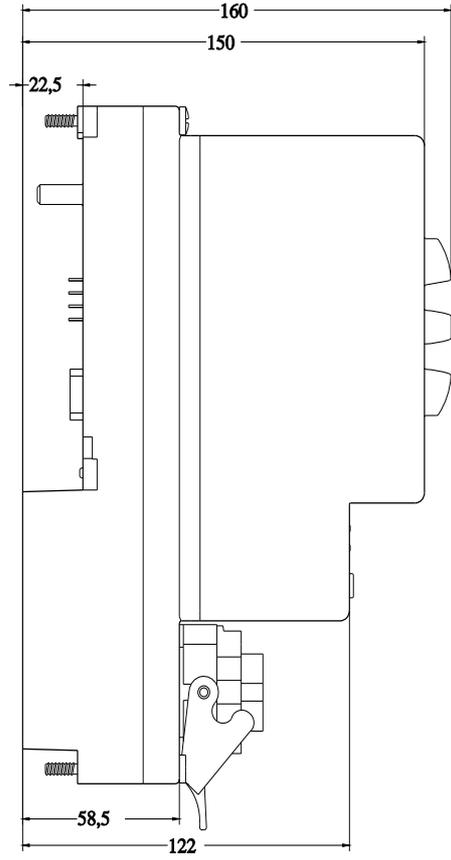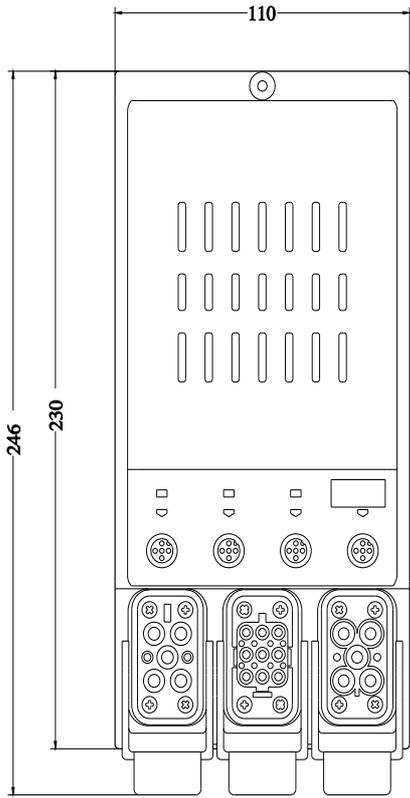

last modified:

3/11/2024 