

CABLE TIES with marker GTK - natural

material: polyamide 6.6

installation temp.: -10°C to +60°C


working temp.: -40°C to +85°C


dielectric resistance: 50kV/mm²

humidity absorption: 2,5% (50% R.H., +23°C)

flammability to raw material: UL-94 V2

tolerance: ±5%

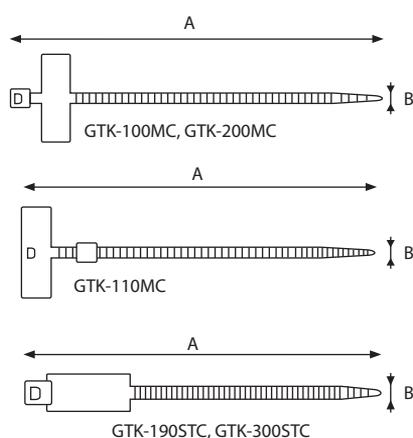

| TYPE |  DIMENSIONS [mm] |  BUNDLE DIAMETER [mm] |  TENSILE STRENGTH [kg] |  MARKER DIMENSIONS [mm] |  PACKAGE [pcs] |  |
|------------|---|--|---|--|--|---|
| GTK-100MC | 100x2,5 | 23 | 8 | 25x8 | 100 | <input type="checkbox"/> |
| GTK-110MC | 110x2,5 | 20 | 8 | 25x8 | 100 | <input type="checkbox"/> |
| GTK-200MC | 200x2,5 | 50 | 8 | 30x15 | 100 | <input type="checkbox"/> |
| GTK-190STC | 200x4,6 | 50 | 22 | 13x28 | 100 | <input type="checkbox"/> |
| GTK-300STC | 270x4,6 | 75 | 22 | 13x28 | 100 | <input type="checkbox"/> |



RoHS
Compliant

