



switch disconnecter, on-off switch 100 A 3-pole + N

Figure similar

| Model | |
|---|---------------------|
| product brand name | SENTRON |
| design of the product | 3 NO + N |
| design of the switching function | Switch disconnecter |
| General technical data | |
| number of poles | 3 |
| design of pole | 3P+N |
| short-circuit current rating | 10 kA |
| type of voltage of the operating voltage | AC |
| Supply voltage | |
| operating voltage rated value | 440 V |
| value range of the operating frequency | 50/60 Hz |
| Protection class | |
| protection class IP | other |
| Breaking Capacity | |
| switching capacity current rated value | 0.3 kA |
| Dissipation | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 5.5 W |
| Main circuit | |
| operational current rated value | 100 A |
| Product details | |
| product component signal lamp | No |
| number of NO contacts | 3 |
| Product function | |
| product function positive opening (acc. to DIN VDE 0113) | No |
| connectable conductor cross-section for flexible conductor with core end processing | |
| • minimum | 2.5 mm ² |
| • maximum | 50 mm ² |
| connectable conductor cross-section for rigid conductor | |
| • minimum | 2.5 mm ² |
| • maximum | 50 mm ² |
| tightening torque with screw-type terminals | |
| • minimum | 2.5 N·m |
| • maximum | 3 N·m |
| Mechanical Design | |
| height | 89.8 mm |
| depth | 74.5 mm |

| | |
|--|--------|
| installation depth | 70 mm |
| number of modular width units | 4 |
| net weight | 432 g |
| ambient temperature during operation | |
| • minimum | -5 °C |
| • maximum | 40 °C |
| ambient temperature during storage minimum | -25 °C |

Approvals Certificates

General Product Approval



[Confirmation](#)



[Miscellaneous](#)

| | | |
|--------------------------|-------|-------------|
| General Product Approval | other | Environment |
|--------------------------|-------|-------------|



[Miscellaneous](#)



[Environmental Confirmations](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TL1691-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TL1691-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TL1691-0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

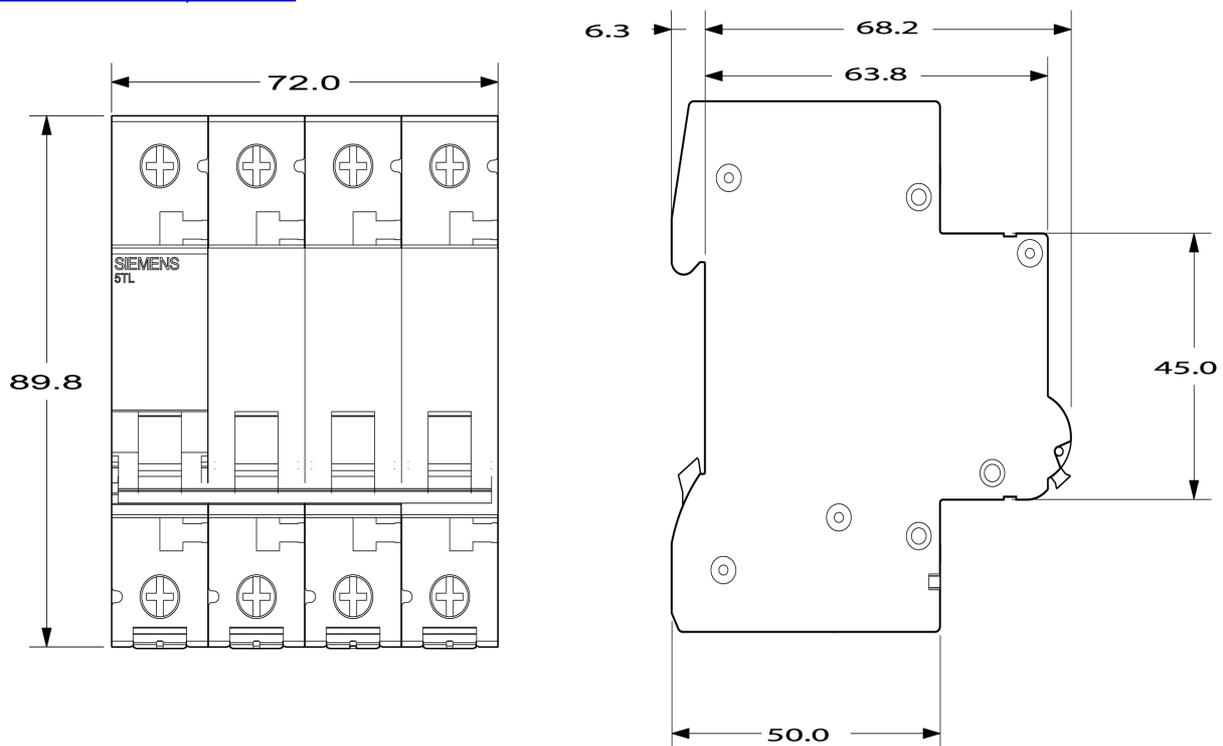

last modified:

7/20/2022 