



Integrated signal lamp, repeated flash light, with integrated LED, yellow, 24 V AC/DC, Diameter 70 mm

Figure similar

General technical data	
product designation	Repeated-flash light element
consumed current maximum	45 mA
type of voltage of the operating voltage	AC/DC
operating voltage	
• 1 at DC rated value	24 V
• 1 at AC at 50 Hz rated value	24 V
• 1 at AC at 60 Hz rated value	24 V
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage	-10 %
reference code according to IEC 81346-2	P
fastening method	Bayonet / flush mounting
material	PC; PC/ABS; PA
color	yellow
Mechanical data	
product component light source	Yes
type of electrical connection	screw-type terminals
outer diameter of the signal column element	75 mm
Lamp	
design of the optical signal	blinklight
type of light source	LED
light intensity	1.88 cd
flashing frequency	1 Hz
service life of LED	100 000 h
Ambient conditions	
ambient temperature during operation	-20 ... +50 °C
protection class IP	IP65
depth	31 mm
height	66 mm
width	75 mm
Certificates/ approvals	
General Product Approval	EMV



EG-Konf.



[Confirmation](#)



RCM

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD5320-5BD>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD5320-5BD>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD5320-5BD>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD5320-5BD&lang=en

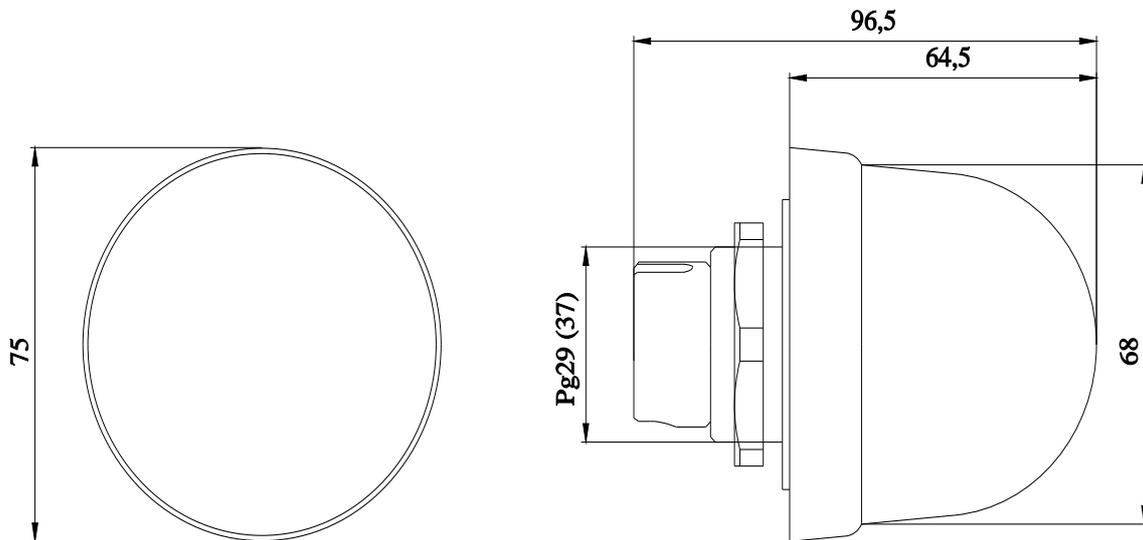

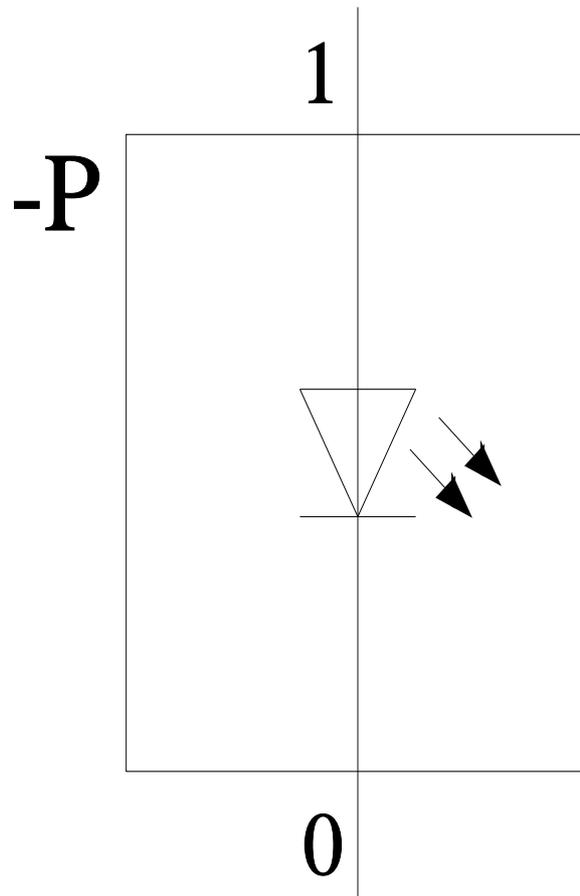

last modified:

3/12/2024 