



Figure similar

Integrated signal lamp, continuous light, red, 12-230 V AC/DC, Diameter 70 mm


General technical data	
product designation	Continuous light element
type of voltage of the operating voltage	AC/DC
operating voltage	
• at DC rated value	12 ... 230 V
• at AC at 50 Hz rated value	12 ... 230 V
• at AC at 60 Hz rated value	12 ... 230 V
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage	-10 %
consumed active power	5 W
reference code according to IEC 81346-2	P
fastening method	Bayonet / flush mounting
material	PC; PC/ABS; PA
color	red
Mechanical data	
product component light source	No
type of electrical connection	screw-type terminals
outer diameter of the signal column element	75 mm
Lamp	
socket design	BA 15d
design of the optical signal	continuous light
type of light source	filament lamp / LED
Ambient conditions	
ambient temperature during operation	-20 ... +60 °C
protection class IP	IP65
depth	31 mm
height	66 mm
width	75 mm
Certificates/ approvals	
General Product Approval	EMV




[Confirmation](#)



other	Environment
-------	-------------

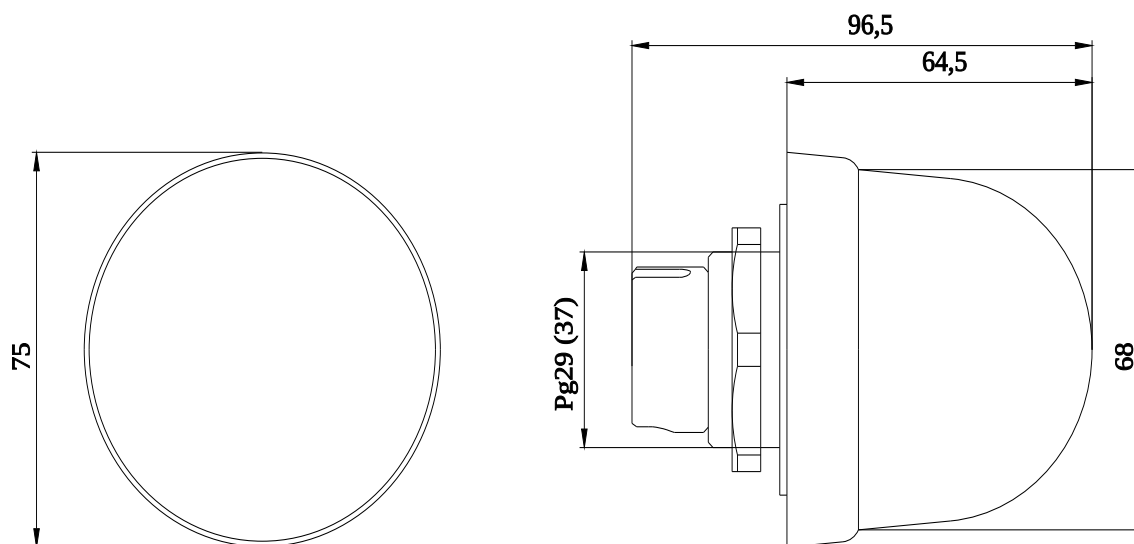Further information**Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD5300-1AB>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD5300-1AB>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/8WD5300-1AB>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD5300-1AB&lang=en

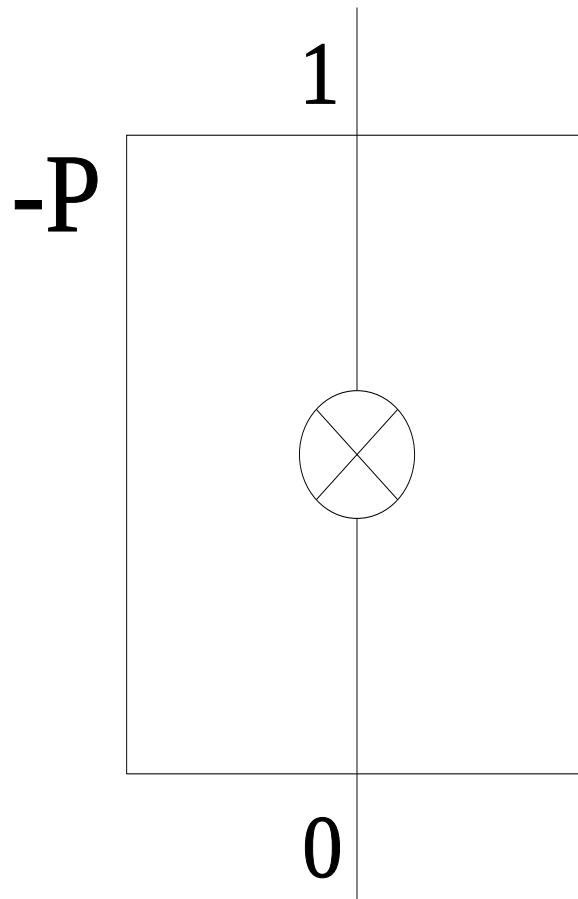

last modified:

3/12/2024 