

PM-X for motor starter connection module up to safety category 4 EN 954-1 for feedback circuit and infeed protection 15 mm can be plugged onto TM-X15 S27-01	
product brand name	Local Safety Modules - accessories
product designation	PM-X
design of the product	for safety circuits
General technical data	
product function	
• bus communication	Yes
• short circuit protection	No
Substance Prohibittance (Date)	05/01/2012
SVHC substance name	Bleimonoxyd (Bleioxyd) - 1317-36-8 Bleitanzirkonoxyd - 12626-81-2 Tris(4-Nonylphenyl, verzweigt und linear) - -
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
•	20.4 ... 28.8 V
Installation/ mounting/ dimensions	
height	196.5 mm
width	30 mm
depth	117.5 mm
Approvals Certificates	
General Product Approval	



[Confirmation](#)



EMV	Test Certificates	other
-----	-------------------	-------



[KC](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1903-1CB00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-1CB00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-1CB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-1CB00&lang=en

-Q1

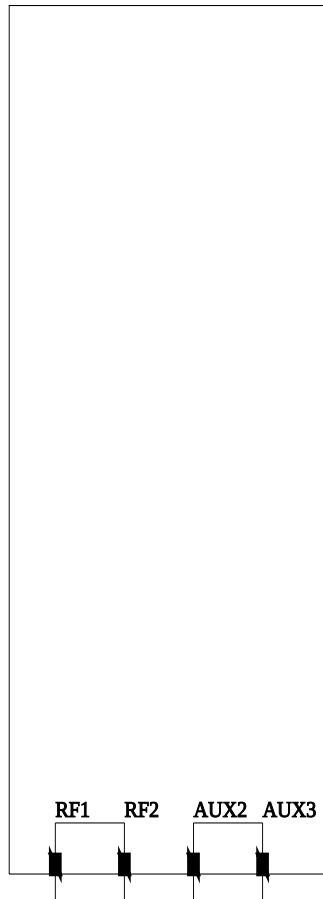

last modified:

9/5/2023 