




## Dławice MPG - moziężne

**materiał:** mosiądz niklowany + NBR

**stopień szczelności:** IP68

**temp. pracy:** -40°C do +100°C

**tolerancja:** ±5%

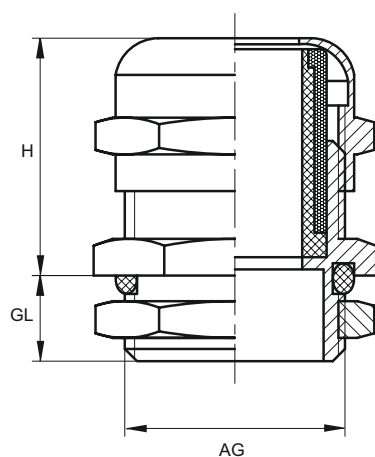

| TYP      | RODZAJ<br>GWINTU | WYMIARY [mm] |      |      | ZAKRES<br>DŁAWIENIA<br>PRZEWODÓW<br>[mm] | ROZMIAR<br>KLUCZA<br>[mm] |
|----------|------------------|--------------|------|------|------------------------------------------|---------------------------|
|          |                  | GL           | AG   | H    |                                          |                           |
| MPG-7    | PG-7             | 6,5          | 12,5 | 17,0 | 3-6,5                                    | 14/15                     |
| MPG-9    | PG-9             | 8,0          | 15,2 | 19,0 | 4-8                                      | 17/18                     |
| MPG-11   | PG-11            | 8,0          | 18,6 | 21,0 | 5-10                                     | 20/21                     |
| MPG-13,5 | PG-13,5          | 8,0          | 20,4 | 22,0 | 6-12                                     | 22/23                     |
| MPG-16   | PG-16            | 8,5          | 22,5 | 23,0 | 10-14                                    | 24/25                     |
| MPG-21   | PG-21            | 9,0          | 28,3 | 27,0 | 13-18                                    | 30                        |
| MPG-29   | PG-29            | 10,0         | 37,0 | 31,0 | 18-25                                    | 40                        |
| MPG-36   | PG-36            | 11,0         | 47,0 | 37,0 | 25-33                                    | 50                        |
| MPG-42   | PG-42            | 13,0         | 54,0 | 37,0 | 32-38                                    | 57                        |
| MPG-48   | PG-48            | 14,0         | 59,3 | 38,0 | 37-44                                    | 64                        |

CE RoHS Compliant IP68



TRYTYT.COM!