

Overload relay, ZB65, Ir= 50 - 65 A, 1 N/O, 1 N/C, Direct mounting, IP00



Part no. ZB65-65  
Catalog No. 278460  
Alternate Catalog No. XTOB065DC1  
EL-Nummer 4131855  
(Norway)

Delivery program

|                                                                                  |                |   |                                                                      |
|----------------------------------------------------------------------------------|----------------|---|----------------------------------------------------------------------|
| Product range                                                                    |                |   | Overload relay ZB up to 150 A                                        |
| Product range                                                                    |                |   | Accessories                                                          |
| Accessories                                                                      |                |   | Overload relays                                                      |
| Frame size                                                                       |                |   | ZB65                                                                 |
| Phase-failure sensitivity                                                        |                |   | IEC/EN 60947, VDE 0660 Part 102                                      |
| Description                                                                      |                |   | Test/off button<br>Reset pushbutton manual/auto<br>Trip-free release |
| Mounting type                                                                    |                |   | Direct mounting                                                      |
|  | I <sub>r</sub> | A | 50 - 65                                                              |

Auxiliary contacts

|                       |  |  |                                                                                                                                                |
|-----------------------|--|--|------------------------------------------------------------------------------------------------------------------------------------------------|
| N/O = Normally open   |  |  | 1 N/O                                                                                                                                          |
| N/C = Normally closed |  |  | 1 N/C                                                                                                                                          |
| For use with          |  |  | DILM40<br>DILM50<br>DILM65<br>DILM72<br>DILMF40<br>DILMF50<br>DILMF65<br>DIULM40<br>DIULM50<br>DIULM65<br>SDAINLM70<br>SDAINLM90<br>SDAINLM115 |

Short-circuit protection

|                                                                                                              |       |   |     |
|--------------------------------------------------------------------------------------------------------------|-------|---|-----|
| Type "1" coordination<br> | gG/gL | A | 160 |
| Type "2" coordination<br> | gG/gL | A | 100 |

Notes

Overload trigger: tripping class 10 A

Short circuit protection: observe the maximum permissible fuse of the contactor with direct device mounting.

Suitable for protection of Ex e-motors.



II(2)G [Ex d] [Ex e] [Ex px], II(2)D [Ex p] [Ex t]



PTB 10 ATEX 3010

Observe manual MN03407005Z-DE/EN.

Notes

Fitted directly to the contactor

Separate mounting

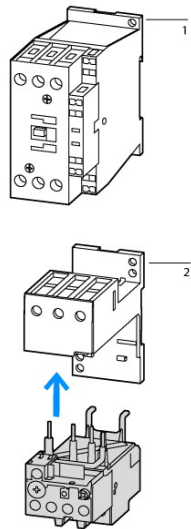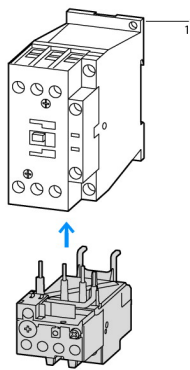

1 Contactor  
2 Bases

## Technical data

### General

|                                                                       |  |    |                                                                                |
|-----------------------------------------------------------------------|--|----|--------------------------------------------------------------------------------|
| Standards                                                             |  |    | IEC/EN 60947, VDE 0660, UL, CSA                                                |
| Climatic proofing                                                     |  |    | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature                                                   |  |    |                                                                                |
|                                                                       |  |    | Operating range to IEC/EN 60947<br>PTB: -5 °C - +55 °C                         |
| Open                                                                  |  | °C | -25 - +55                                                                      |
| Enclosed                                                              |  | °C | - 25 - 40                                                                      |
| Temperature compensation                                              |  |    | Continuous                                                                     |
| Weight                                                                |  | kg | 0.23                                                                           |
| Mechanical shock resistance                                           |  | g  | 10<br>Sinusoidal<br>Shock duration 10 ms                                       |
| Degree of Protection                                                  |  |    | IP00                                                                           |
| Protection against direct contact when actuated from front (EN 50274) |  |    | Finger and back-of-hand proof                                                  |
| Altitude                                                              |  | m  | Max. 2000                                                                      |

### Main conducting paths

|                                                |           |                 |                              |
|------------------------------------------------|-----------|-----------------|------------------------------|
| Rated impulse withstand voltage                | $U_{imp}$ | V AC            | 6000                         |
| Overvoltage category/pollution degree          |           |                 | III/3                        |
| Rated insulation voltage                       | $U_i$     | V               | 690                          |
| Rated operational voltage                      | $U_e$     | V AC            | 690                          |
| Safe isolation to EN 61140                     |           |                 |                              |
| Between auxiliary contacts and main contacts   |           | V AC            | 440                          |
| Between main circuits                          |           | V AC            | 440                          |
| Temperatur compensation residual error > 40 °C |           |                 | $\leq 0.25 \text{ \%}/K$     |
| Current heat loss (3 conductors)               |           |                 |                              |
| Lower value of the setting range               |           | W               | 8                            |
| Maximum setting                                |           | W               | 13.5                         |
| Terminal capacities                            |           | mm <sup>2</sup> |                              |
| Solid                                          |           | mm <sup>2</sup> | 1 x (1 - 16)<br>2 x (1 - 16) |
| Flexible with ferrule                          |           | mm <sup>2</sup> | 1 x (1 - 25)<br>2 x (1 - 25) |
| Stranded                                       |           | mm <sup>2</sup> | 1 x (16 - 25)                |
| Solid or stranded                              |           | AWG             | 14 - 2                       |
| Terminal screw                                 |           |                 | M6                           |
| Tightening torque                              |           | Nm              | 3.5                          |
| Stripping length                               |           | mm              | 11                           |
| Tools                                          |           |                 |                              |

|                                       |                  |                 |                                                                                 |
|---------------------------------------|------------------|-----------------|---------------------------------------------------------------------------------|
| Pozidriv screwdriver                  |                  | Size            | 2                                                                               |
| Standard screwdriver                  |                  | mm              | 1 x 6                                                                           |
| <b>Auxiliary and control circuits</b> |                  |                 |                                                                                 |
| Rated impulse withstand voltage       | U <sub>imp</sub> | V               | 4000                                                                            |
| Overvoltage category/pollution degree |                  |                 | III/3                                                                           |
| Terminal capacities                   |                  | mm <sup>2</sup> |                                                                                 |
| Solid                                 |                  | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 4)                                                |
| Flexible with ferrule                 |                  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                                            |
| Solid or stranded                     |                  | AWG             | 2 x (18 - 14)                                                                   |
| Terminal screw                        |                  |                 | M3.5                                                                            |
| Tightening torque                     |                  | Nm              | 1.2                                                                             |
| Stripping length                      |                  | mm              | 8                                                                               |
| Tools                                 |                  |                 |                                                                                 |
| Pozidriv screwdriver                  |                  | Size            | 2                                                                               |
| Standard screwdriver                  |                  | mm              | 1 x 6                                                                           |
| Rated insulation voltage              | U <sub>i</sub>   | V AC            | 500                                                                             |
| Rated operational voltage             | U <sub>e</sub>   | V AC            | 500                                                                             |
| Safe isolation to EN 61140            |                  |                 |                                                                                 |
| between the auxiliary contacts        |                  | V AC            | 240                                                                             |
| Conventional thermal current          | I <sub>th</sub>  | A               | 6                                                                               |
| Rated operational current             | I <sub>e</sub>   | A               |                                                                                 |
| AC-15                                 |                  |                 |                                                                                 |
| Make contact                          |                  |                 |                                                                                 |
| 120 V                                 | I <sub>e</sub>   | A               | 1.5                                                                             |
| 220 V 230 V 240 V                     | I <sub>e</sub>   | A               | 1.5                                                                             |
| 380 V 400 V 415 V                     | I <sub>e</sub>   | A               | 0.5                                                                             |
| 500 V                                 | I <sub>e</sub>   | A               | 0.5                                                                             |
| Break contact                         |                  |                 |                                                                                 |
| 120 V                                 | I <sub>e</sub>   | A               | 1.5                                                                             |
| 220 V 230 V 240 V                     | I <sub>e</sub>   | A               | 1.5                                                                             |
| 380 V 400 V 415 V                     | I <sub>e</sub>   | A               | 0.9                                                                             |
| 500 V                                 | I <sub>e</sub>   | A               | 0.8                                                                             |
| DC L/R ≤ 15 ms                        |                  |                 |                                                                                 |
|                                       |                  |                 | Switch-on and switch-off conditions based on DC-13, time constant as specified. |
| 24 V                                  | I <sub>e</sub>   | A               | 0.9                                                                             |
| 60 V                                  | I <sub>e</sub>   | A               | 0.75                                                                            |
| 110 V                                 | I <sub>e</sub>   | A               | 0.4                                                                             |
| 220 V                                 | I <sub>e</sub>   | A               | 0.2                                                                             |
| Short-circuit rating without welding  |                  |                 |                                                                                 |
| max. fuse                             |                  | A gG/gL         | 6                                                                               |

Notes

**Notes** Ambient air temperature: Operating range to IEC/EN 60947, PTB: -5°C to +55°C  
Main circuits terminal capacity solid and flexible conductors with ferrules: When using 2 conductors use equal cross-sections.

Rating data for approved types

|                              |  |      |                                                    |
|------------------------------|--|------|----------------------------------------------------|
| Auxiliary contacts           |  |      |                                                    |
| Pilot Duty                   |  |      |                                                    |
| AC operated                  |  |      | B300 at opposite polarity<br>B600 at same polarity |
| DC operated                  |  |      | R300                                               |
| Short Circuit Current Rating |  | SCCR |                                                    |
| Basic Rating                 |  |      |                                                    |
| SCCR                         |  | kA   | 10                                                 |
| max. Fuse                    |  | A    | 200                                                |
| max. CB                      |  | A    | 150                                                |

|                  |  |    |                |
|------------------|--|----|----------------|
| 480 V High Fault |  |    |                |
| SCCR (fuse)      |  | kA | 100            |
| max. Fuse        |  | A  | 125 Class J/CC |
| SCCR (CB)        |  | kA | 65             |
| max. CB          |  | A  | 100            |
| 600 V High Fault |  |    |                |
| SCCR (fuse)      |  | kA | 100            |
| max. Fuse        |  | A  | 125 Class J/CC |

## Design verification as per IEC/EN 61439

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 65                                                                                                                               |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 4.5                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 13.5                                                                                                                             |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 0                                                                                                                                |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 55                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 8.0

|                                                                                                                                                                                            |  |   |                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|-------------------|
| Low-voltage industrial components (EG000017) / Thermal overload relay (EC000106)                                                                                                           |  |   |                   |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Overload protection device / Thermal overload relay (ecl@ss10.0.1-27-37-15-01 [AKF075014]) |  |   |                   |
| Adjustable current range                                                                                                                                                                   |  | A | 50 - 65           |
| Max. rated operation voltage Ue                                                                                                                                                            |  | V | 690               |
| Mounting method                                                                                                                                                                            |  |   | Direct attachment |
| Type of electrical connection of main circuit                                                                                                                                              |  |   | Screw connection  |
| Number of auxiliary contacts as normally closed contact                                                                                                                                    |  |   | 1                 |
| Number of auxiliary contacts as normally open contact                                                                                                                                      |  |   | 1                 |

|                                                     |  |  |            |
|-----------------------------------------------------|--|--|------------|
| Number of auxiliary contacts as change-over contact |  |  | 0          |
| Release class                                       |  |  | CLASS 10 A |
| Reset function input                                |  |  | No         |
| Reset function automatic                            |  |  | Yes        |
| Reset function push-button                          |  |  | Yes        |