



LED module with integrated LED 230 V AC, green, screw terminal, for front plate mounting

**product brand name**  
**product designation**  
**product type designation**

SIRIUS ACT  
LED module  
3SU1

### General technical data

#### product component

- diode
- lamp transformer
- light source
- series resistor

Yes  
No  
Yes  
No

#### insulation voltage rated value

320 V

#### degree of pollution

3

type of voltage of the operating voltage

AC

- for actuation

AC

#### surge voltage resistance rated value

4 kV

consumed current maximum

20 mA

protection class IP

- of the enclosure
- of the terminal

IP40  
IP20

#### shock resistance

- according to IEC 60068-2-27
- for railway applications according to EN 61373

sinusoidal half-wave 15g / 11 ms  
Category 1, Class B

#### vibration resistance

- according to IEC 60068-2-6
- for railway applications according to EN 61373

10 ... 500 Hz: 5g  
Category 1, Class B

#### operating period typical

100 000 h

#### reference code according to IEC 81346-2

P

#### Substance Prohibition (Date)

10/01/2014

#### operating voltage 1

- at AC
  - at 50 Hz rated value
  - at 60 Hz rated value

230 V  
230 V

#### relative positive tolerance of the operating voltage

20 %

#### relative negative tolerance of the operating voltage

20 %

### Control circuit/ Control

#### inrush current maximum

3 A

### Connections/ Terminals

#### type of electrical connection

screw-type terminals

#### type of connectable conductor cross-sections

- solid with core end processing
- solid without core end processing
- finely stranded with core end processing

2x (0.5 ... 0.75 mm<sup>2</sup>)  
2x (1.0 ... 1.5 mm<sup>2</sup>)  
2x (0.5 ... 1.5 mm<sup>2</sup>)


• finely stranded without core end processing • at AWG cables tightening torque with screw-type terminals	2x (1,0 ... 1,5 mm <sup>2</sup> ) 2x (18 ... 14) 0.8 ... 0.9 N·m				
<b>Lamp</b>					
type of light source	LED				
color of the light source	green				
light intensity	900 ... 1 400 mcd				
certificate of suitability					
• ATEX	No				
• IECEx	No				
<b>Ambient conditions</b>					
ambient temperature					
• during operation	-25 ... +70 °C				
• during storage	-40 ... +80 °C				
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted)				
<b>Installation/ mounting/ dimensions</b>					
fastening method	Front plate mounting				
• of modules and accessories					
height	33.2 mm				
width	9.8 mm				
depth	29.4 mm				
suitability for integration					
• plastic enclosure	Yes				
• metal enclosure	Yes				
<b>Certificates/ approvals</b>					
General Product Approval	EMC				
		<a href="#">Confirmation</a>			
<a href="#">Declaration of Conformity</a>		<a href="#">Test Certificates</a>		<a href="#">Marine / Shipping</a>	
		<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Special Test Certificate</a>		
<a href="#">Marine / Shipping</a>		<a href="#">other</a>		<a href="#">Environment</a>	
		<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>		
<b>Further information</b>					
Siemens has decided to exit the Russian market (see here). <a href="https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business">https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business</a>					
Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).					
Information on the packaging <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>					
Information- and Downloadcenter (Catalogs, Brochures,...) <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>					
Industry Mall (Online ordering system) <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BF40-1AA0">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BF40-1AA0</a>					
Cax online generator <a href="http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1401-1BF40-1AA0">http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1401-1BF40-1AA0</a>					


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1BF40-1AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1401-1BF40-1AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-1BF40-1AA0&lang=en)

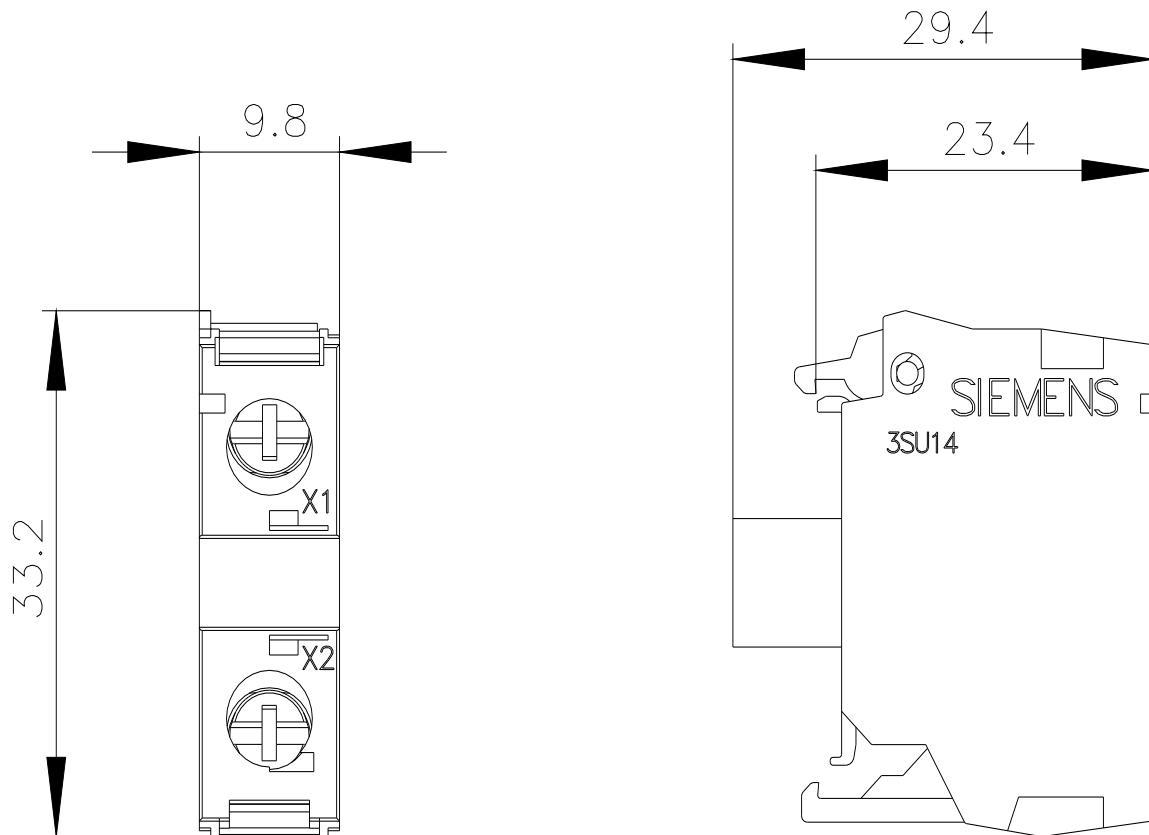

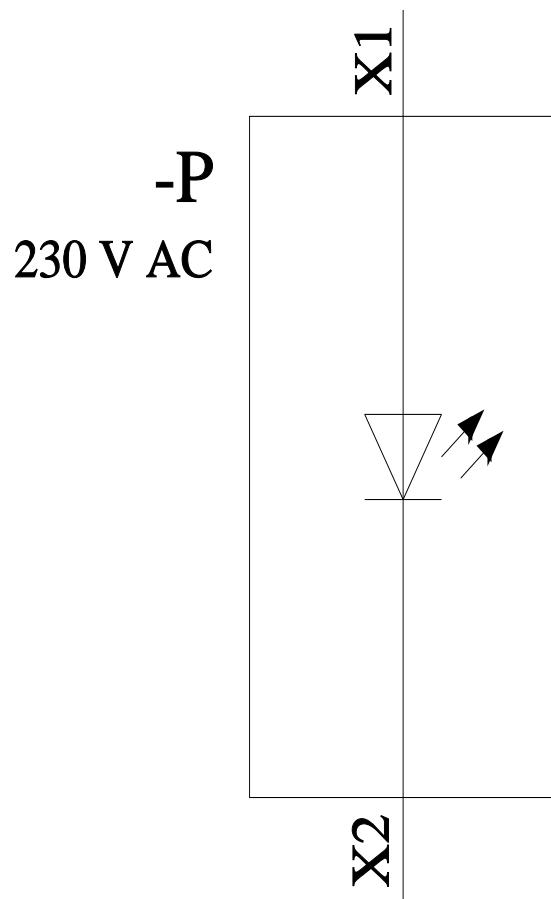

last modified:

3/9/2022