

product designation	Contactor relay for auxiliary circuits, 62E DIN EN50011 6 NO + 2 NC, screw terminal with built-in varistor DC operation 24 V DC	
product type designation	Auxiliary contactor	
size of contactor	3TH4	
reference code according to IEC 81346-2	0	
Substance Prohibitance (Date)	K	
ambient temperature during operation	03/01/2017	
type of voltage of the control supply voltage	-25 ... +55 °C	
control supply voltage at DC	DC	
• rated value	24 V	
design of the surge suppressor	with varistor	
number of NC contacts for auxiliary contacts	2	
• delayed switching	0	
• lagging switching	0	
• make-before-break switching	0	
number of NO contacts for auxiliary contacts	6	
• delayed switching	0	
• leading contact	0	
• make-before-break switching	0	
number of CO contacts for auxiliary contacts	0	
identification number and letter for switching elements	62 E	
operational current at AC-15		
• at 230 V rated value	10 A	
• at 400 V rated value	6 A	
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022	
height	78 mm	
width	45 mm	
depth	135 mm	
type of electrical connection for auxiliary and control circuit	screw-type terminals	

Safety related data

B10 value with high demand rate according to SN 31920	1 000 000; With 0.3 x Ie
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP00

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TH4262-4BB4>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH4262-4BB4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4262-4BB4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH4262-4BB4&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4262-4BB4/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TH4262-4BB4&objecttype=14&gridview=view1>

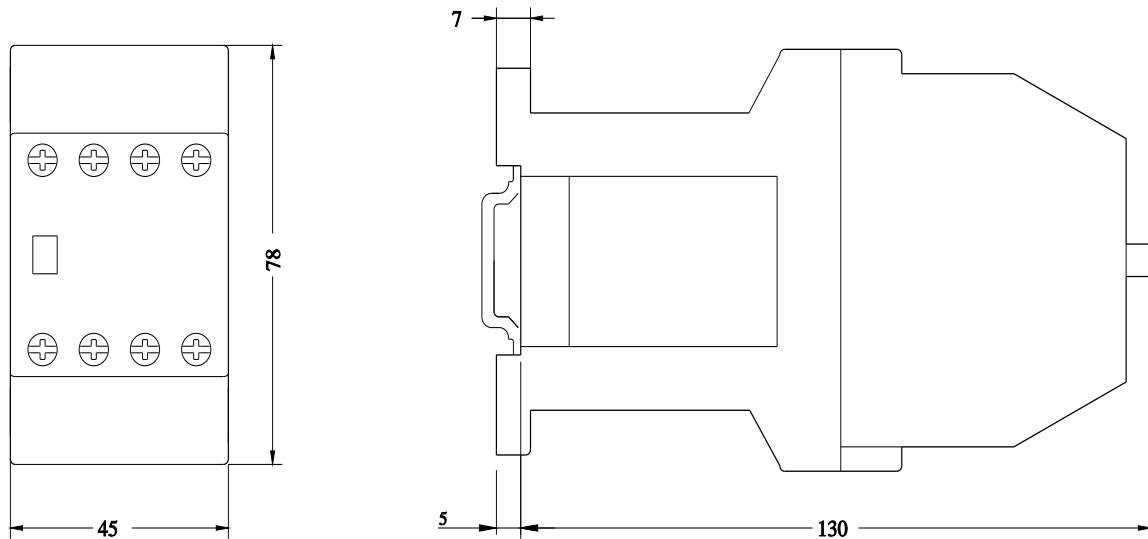

last modified:

11/21/2022 