


Pin busbar, 10 mm<sup>2</sup> connection: 3x 2-phase touch-safe



Model	
product brand name	SETRON
product designation	Pin busbar
design of the product	10 mm <sup>2</sup> , 3x2PH
General technical data	
phase number	2
cross-section	10 mm <sup>2</sup>
Main circuit	
operational current rated value	63 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	6.9 mm
length	105 mm
net weight	28 g
Approvals Certificates	
General Product Approval	other

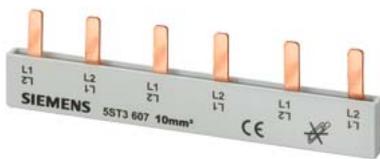

[Confirmation](#)

[Miscellaneous](#)




[Miscellaneous](#)

other	Environment
<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>
	<a href="#">Environmental Confirmations</a>

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=5ST3607>  
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/5ST3607>

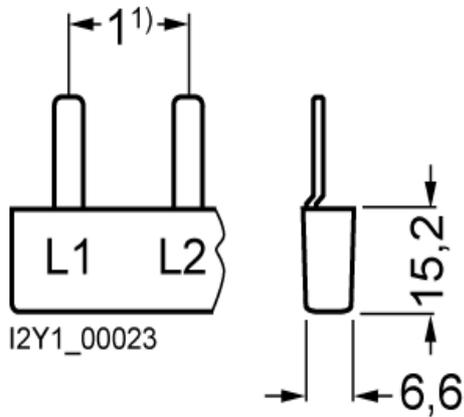

1) Pin spacings in MW (Modular widths, 1 MW = 18

