

compact Pin Busbar, 10mm² connection: 3p+N compact device 1 MW touch protected 1000mm cuttable



Model	
product brand name	SETRON
product designation	Pin busbar
design of the product	10 mm ² , 3p+N, 60MW, 12x compact, can be cut
General technical data	
phase number	3
cross-section	10 mm ²
operating voltage rated value maximum	230 V
Main circuit	
operational current rated value	63 A
Suitability	
suitability for interaction	
• devices with auxiliary switch	No
• devices with N conductor	Yes
Product details	
product feature insulated	Yes
Number	
number of devices suitable for fitting	60
Connections	
type of electrical connection	Pin
Mechanical Design	
module width	18 mm
height	13 mm
width	40.8 mm
length	1 060 mm
net weight	679 g
Approvals Certificates	
General Product Approval	
other	



[Confirmation](#)[Miscellaneous](#)



[Miscellaneous](#)

other	Environment
Confirmation	Environmental Con- firmations Environmental Con- firmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3773-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3773-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3773-0


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

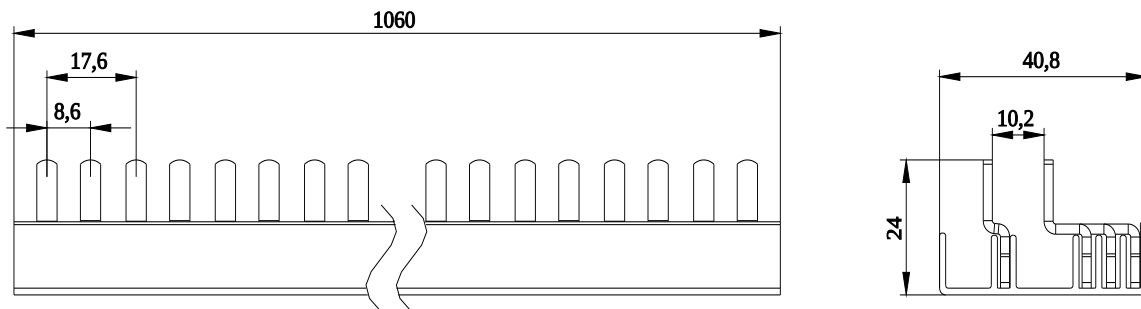



last modified:

7/9/2021 

